



TL-BLHN



Bollard light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B10 @ 50,000 hours)

Body Type: Die cast Aluminium housing, Corrosion & Shock Resistant

Diffuser: Tempered Glass

Light Source: Osram 3030 or Equivalent

Driver: Meanwell or Equivalent

Input Voltage: 100 - 277V

Driver Protection: Class I

Operating Temperature: - 20°C + 55°C

Beam Angle: 360°

Body Color: Matt Black, Dark Grey or Custom Finish

Dimmable: 1-10V & Dali

On Request: Other Wattage & Dimension Variants




Templux Lighting s.r.l, Via Gradenigo 58, PD35100, Italy, info@templuxitaly.com, www.templuxitaly.com



Product Variants

Product Code	Wattage	CRI	Efficiency	CCT	Size (mm)
TL-BLHN-01-10W	10W	80	100 lm/W	3000K/6500K	500x100x100 mm
TL-BLHN-02-20W	20W	80	100 lm/W	3000K/6500K	1000x150x150 mm
TL-BLHN-03-25W	25W	80	100 lm/W	3000K/6500K	1500x150x150 mm
TL-BLHN-04-30W	30W	80	100 lm/W	3000K/6500K	2000x150x150 mm

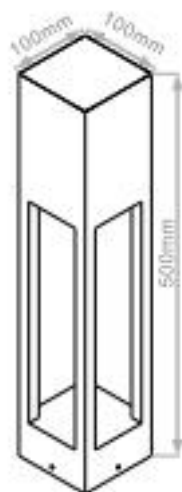



Product Variants

Product Code	Wattage	CRI	Efficiency	CCT	Size (mm)
TL-BLHN-05-10W	10W	80	100 lm/W	3000K/6500K	300x300x150 mm
TL-BLHN-06-20W	20W	80	100 lm/W	3000K/6500K	600x300x150 mm
TL-BLHN-07-25W	25W	80	100 lm/W	3000K/6500K	1100x300x150 mm
TL-BLHN-08-30W	30W	80	100 lm/W	3000K/6500K	1500x300x150 mm

