



## TL-HBKH2



Industrial & Commercial Highbay fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B20 @ 30,000 hours)

Body Type: Die cast aluminium

Light Source: Philips Lumileds 3030, 130 lm/W.

Driver: Mean Well or Equivalent

Input Voltage: 100 - 277V

Driver Protection: Class I

Operating Temperature: - 20°C + 55°C

Beam Angle: 60°, 90° & 120°.

Body Color: Black

Dimmable: 1-10V & Dali

On Request: Other Wattage & Dimension Variants








## Product Variants


Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (MM)
TL-HBKH2-100	100W	13000 lm	130lm/W	3000K/6000K	270X165MM
TL-HBKH2-150	150W	19500 lm	130lm/W	3000K/6000K	310X160MM
TL-HBKH2-200	200W	26000 lm	130lm/W	3000K/6000K	360X160MM

Light Distribution Curve [Unit: cd]

Luminaire

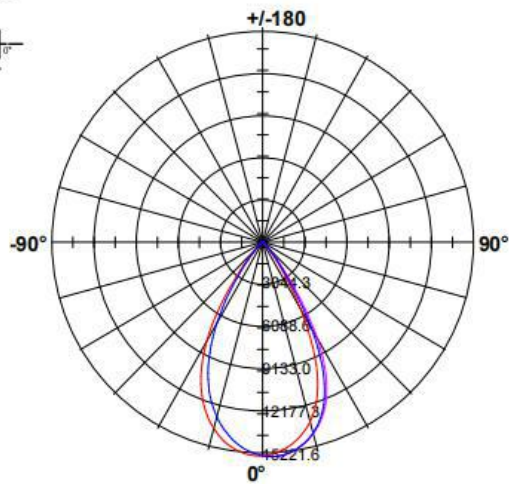


60°



90°

Lux-Distance Curve

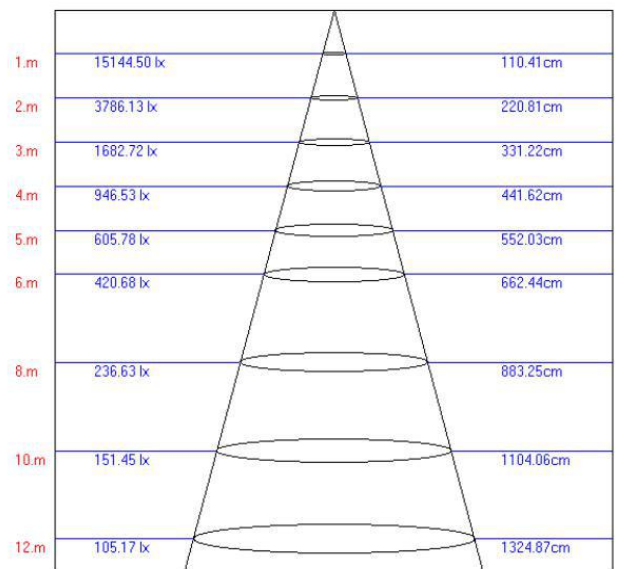

Height E Diameter  
Beam Angle: 58.40°

