



TL-HBLA



Industrial & Commercial Highbay fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L70 @ 107,000 hours)

Body Type: Aluminium Powder Coated

Light Source: Cree or Equivalent.

Driver: Mean Well, Philips or Equivalent

MacAdam: 3

Input Voltage: 198 - 264V

Driver Protection: Class I

Operating Temperature: - 20°C + 55°C

Beam Angle: 55°, 75° & 105°.

Body Color: Grey

Dimmable: Dali

On Request: Other Wattage & Dimension Variants







Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (MM)
TL-HBLA-75	75W	11400 lm	152 lm/W	3000K/6000K	107X320MM
TL-HBLA-103	103W	15400 lm	150 lm/W	3000K/6000K	107X320MM
TL-HBLA-128	128W	20700 lm	161 lm/W	3000K/6000K	107X320MM
TL-HBLA-148	148W	23000 lm	155 lm/W	3000K/6000K	107X320MM

55D

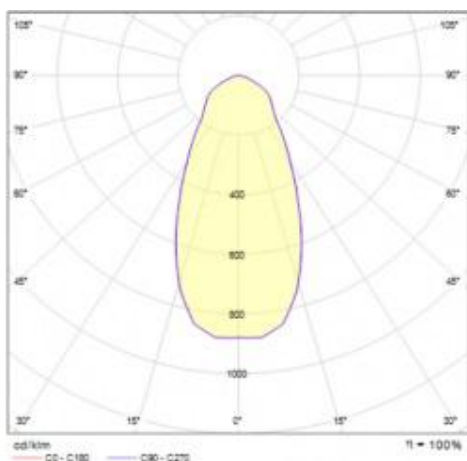

75D

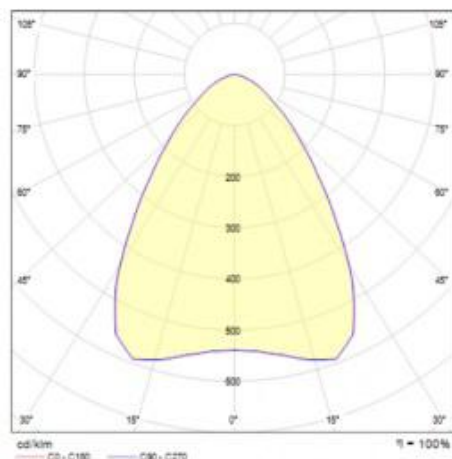

105D

