



TL-LLIPHM1



Linear light fixture with IP. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L70 @ 60,000 hours)

Body Type: Aluminium Alloy body

Diffuser: PC cover

Light Source: Philips or Equivalent

Driver: Mean Well

Input Voltage: 220 - 240V

Driver Protection: Class I

Operating Temperature: - 20°C + 55°C

Beam Angle: 120°.

Body Color: White / Black / Customized


Communication Protocol: DMX512 (1990); RDM Control

Angle Adjustment: 180° Adjustable.

On Request: Other Wattage & Dimension Variants



TL-LLIPHM1-01

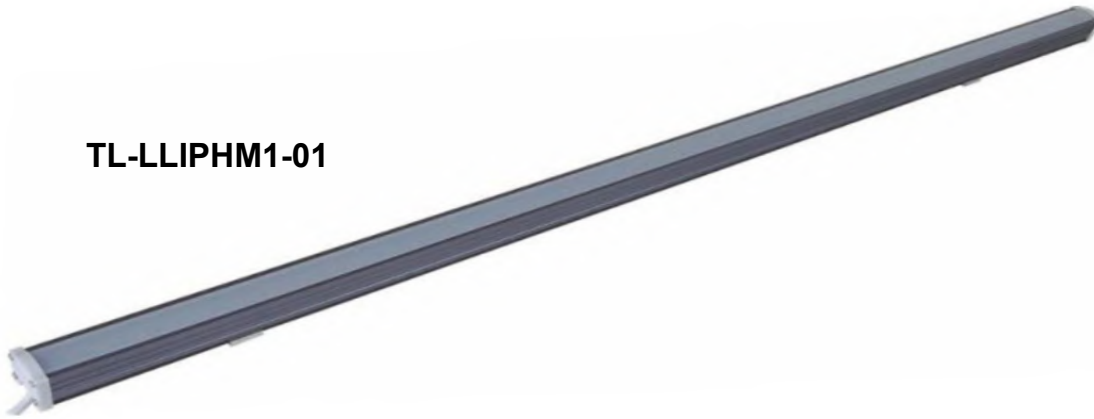

TL-LLIPHM1-02



Controller



TL-LLIPHM1-03



Driver



Product Variants

Product Code	Wattage	Working (V)	CCT	Dimension LxWxH (MM)
TL-LLIPHM1-01	12W	DC 24V	2700K - 6500K, RGB, RGBW	1000x30x33MM
TL-LLIPHM1-02	12W/18W	DC 24V	2700K - 6500K, RGB, RGBW	1000x32x43MM
TL-LLIPHM1-03	12W	DC 24V	2700K - 6500K, RGB, RGBW	1000x24x26MM

