



TL-FKSTPL



Wall Recessed outdoor light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Aluminium

Diffuser: Toughened Glass

Light Source: Cree, Epistar or Equivalent

Input Voltage: 100 - 277V

Driver Protection: Class I

Operating Temperature: - 20°C + 55°C

Body Color: Graphite, Black & White

On Request: Other Wattage & Dimension Variants



TL-FKSTPL-01




TL-FKSTPL-02

Product Variants

Product Code	Wattage	Lumen	CCT	Dimension
TL-FKSTPL-01-A	1W	100 lm	2700K - 6500K	82x75 MM
TL-FKSTPL-01-B	3W	240 lm	2700K - 6500K	82x75 MM
TL-FKSTPL-02-A	1W	100 lm	2700K - 6500K	84x75 MM
TL-FKSTPL-02-A	3W	240 lm	2700K - 6500K	84x75 MM



TL-FKSTPL-03

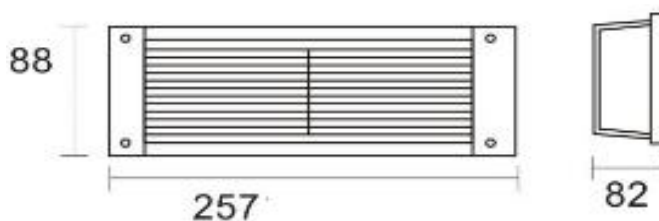


Product Variants

Product Code	Wattage	Lumen	CCT	Dimension
TL-FKSTPL-03-A	3W	300 lm	2700K - 6500K	257x82x88MM
TL-FKSTPL-03-B	6W	600 lm	2700K - 6500K	257x82x88MM
TL-FKSTPL-03-C	9W	900 lm	2700K - 6500K	257x82x88MM
TL-FKSTPL-03-D	12W	1200 lm	2700K - 6500K	257x82x88MM





TL-FKSTPL-04

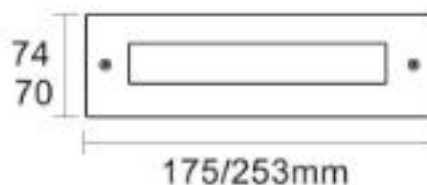

Plastic box
outer casing

TL-FKSTPL-05

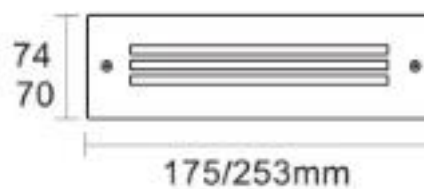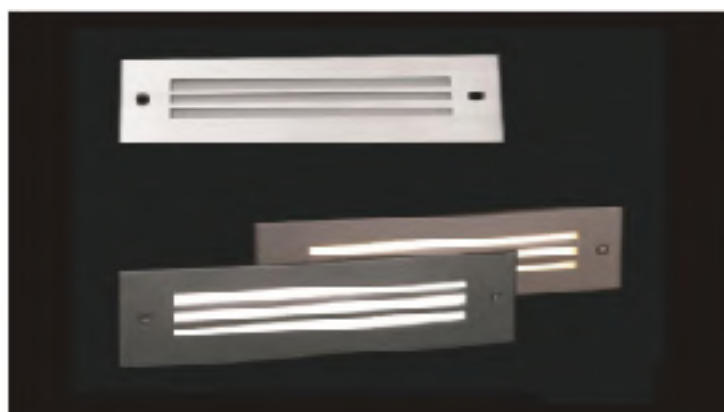



Product Variants

Product Code	Wattage	Lumen	CCT	Dimension
TL-FKSTPL-04-A	6W	660 lm	2700K - 6500K	175x70x82 MM
TL-FKSTPL-04-B	12W	1320 lm	2700K - 6500K	253x74x82 MM
TL-FKSTPL-05-A	6W	600 lm	2700K - 6500K	175x70x94 MM
TL-FKSTPL-05-B	12W	1320 lm	2700K - 6500K	253x74x94 MM






TL-FKSTPL-06

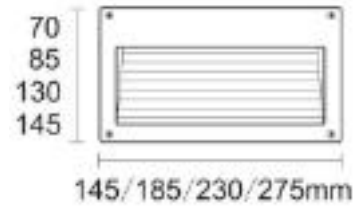

TL-FKSTPL-07

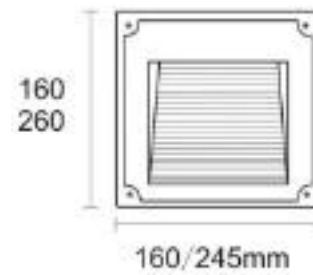

Product Variants


Product Code	Wattage	Lumen	CCT	Dimension
TL-FKSTPL-06-A	6W	660 lm	2700K - 6500K	145x70x65 MM
TL-FKSTPL-06-B	6W	660 lm	2700K - 6500K	185x85x68 MM
TL-FKSTPL-06-C	8W	880 lm	2700K - 6500K	230x130x113 MM
TL-FKSTPL-06-D	12W	1320 lm	2700K - 6500K	275x145x113 MM
TL-FKSTPL-07-A	6W	660 lm	2700K - 6500K	160x160x70 MM
TL-FKSTPL-07-B	12W	1320 lm	2700K - 6500K	245x260x115 MM




TL-FKSTPL-08



TL-FKSTPL-09

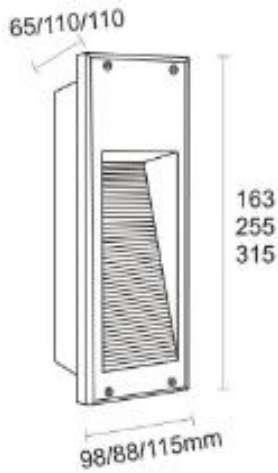

Plastic box

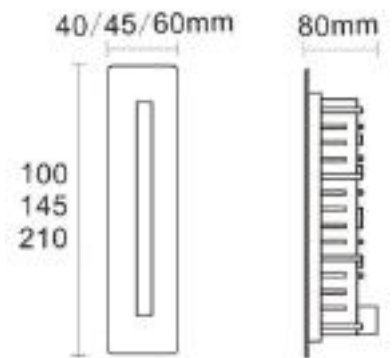

Product Variants

Product Code	Wattage	Lumen	CCT	Dimension
TL-FKSTPL-08-A	6W	660 lm	2700K - 6500K	163x98x65 MM
TL-FKSTPL-08-B	12W	1260 lm	2700K - 6500K	255x88x110 MM
TL-FKSTPL-08-C	12W	1260 lm	2700K - 6500K	255x88x110 MM
TL-FKSTPL-09-A	1W	110 lm	2700K - 6500K	100x40x80 MM
TL-FKSTPL-09-B	3W	330 lm	2700K - 6500K	145x45x80 MM
TL-FKSTPL-09-C	3W	330 lm	2700K - 6500K	210x60x80 MM

