



## TL-BLLIHM01



Ground Recessed mounted fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B20 @ 50,000 hours)

Body Type: Die cast aluminium & Stainless Steel ring

Diffuser: Tempered Clear Glass or Frosted Glass

Light Source: Philips, Cree or Equivalent

Driver: Meanwell or Equivalent

Input Voltage: 220 - 240V

Driver Protection: Class I

Operating Temperature: - 20°C to + 55°C


Beam Angle: 10°, 30°, 45°, 60°, 10x60°, 20x45°

Body Color: Black RAL9005, SS

Dimmable: Dali

On Request: Other Wattage & Dimension Variants



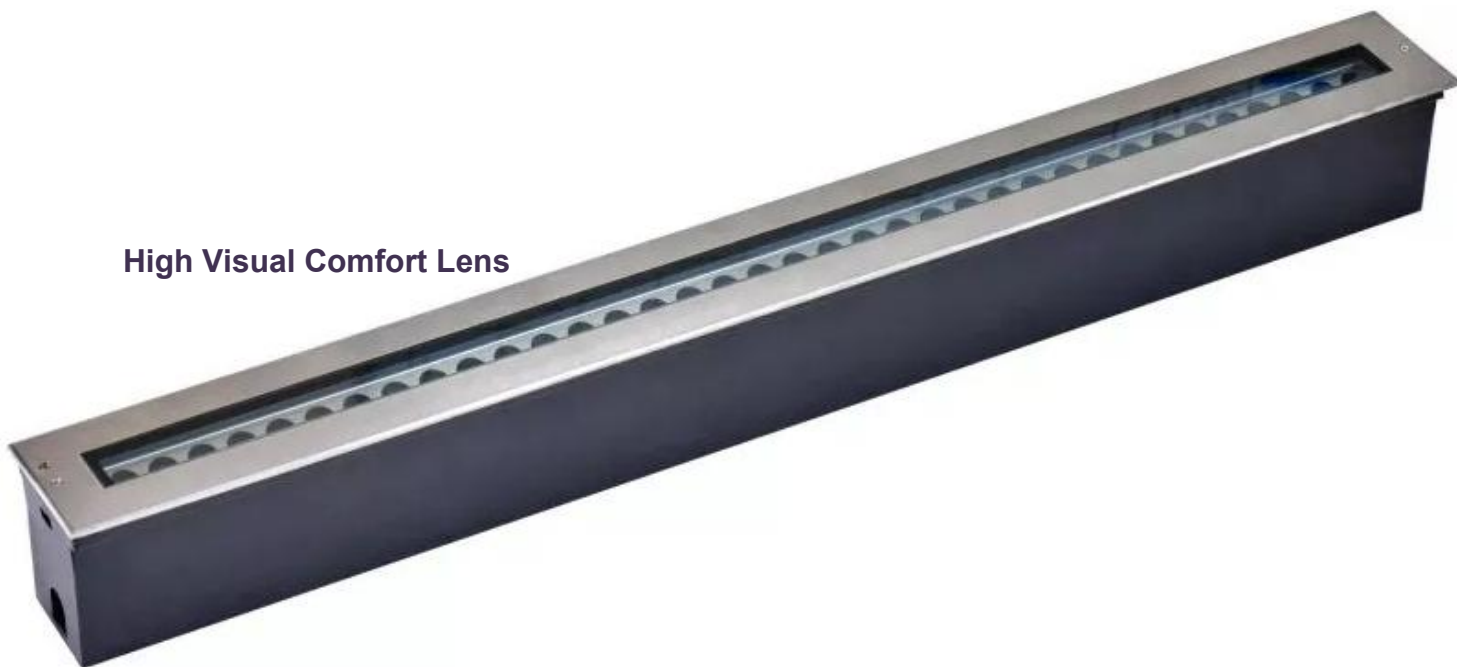

High Visual Comfort Lens

### Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (LxWxH)
TL-BLLIHM01-01	10W	1000lm	15°,30°,45°,60°,10x60°,20x45°	2700K - 6500K	300x75x84 mm
TL-BLLIHM01-02	20W	2000lm	15°,30°,45°,60°,10x60°,20x45°	2700K - 6500K	600x75x84 mm
TL-BLLIHM01-03	30W	3000lm	15°,30°,45°,60°,10x60°,20x45°	2700K - 6500K	900x75x84 mm
TL-BLLIHM01-04	40W	4000lm	15°,30°,45°,60°,10x60°,20x45°	2700K - 6500K	1200x75x84 mm
TL-BLLIHM01-05	50W	5000lm	15°,30°,45°,60°,10x60°,20x45°	2700K - 6500K	1500x75x84 mm

