



TL-DLKML



Recessed Mounted downlight light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L70 @ 60,000 hours)

Body Type: Aluminium Die Cast

Diffuser/Reflector: PC / Aluminium

Light Source: Cree, Philips SMD or COB

Driver: Philips/Tridonic

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Beam Angle: 34°, 36°, 38°, 60° & 90°.

Body Color: White + Iron Grey, Black + Iron Grey

IP Rating: IP20, IP44 & IP65

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT

On Request: Other Wattage & Dimension Variants



PHILIPS
TRIDONIC
CREE 





TL-DLKML-01 SMD

IP 44	IP 65
----------	----------





TL-DLKML-02 COB

IP 44	IP 65
----------	----------



TL-DLKML-03 COB

IP 20

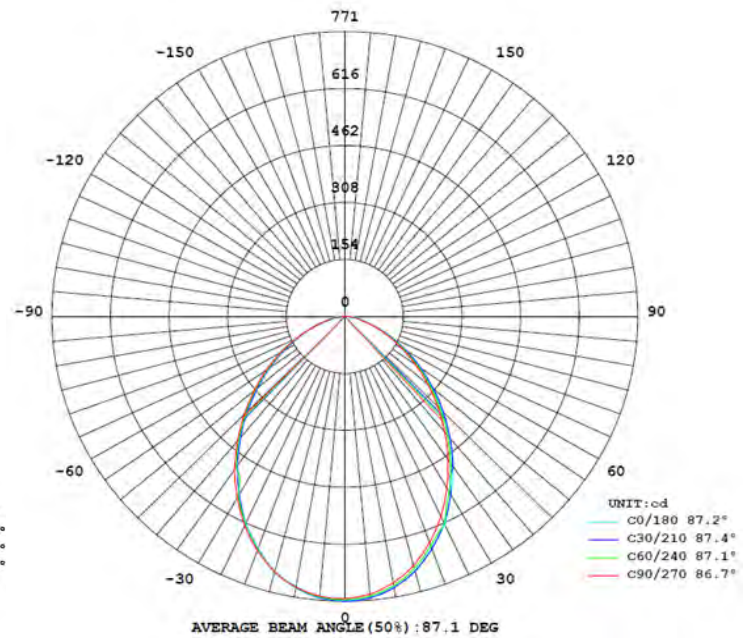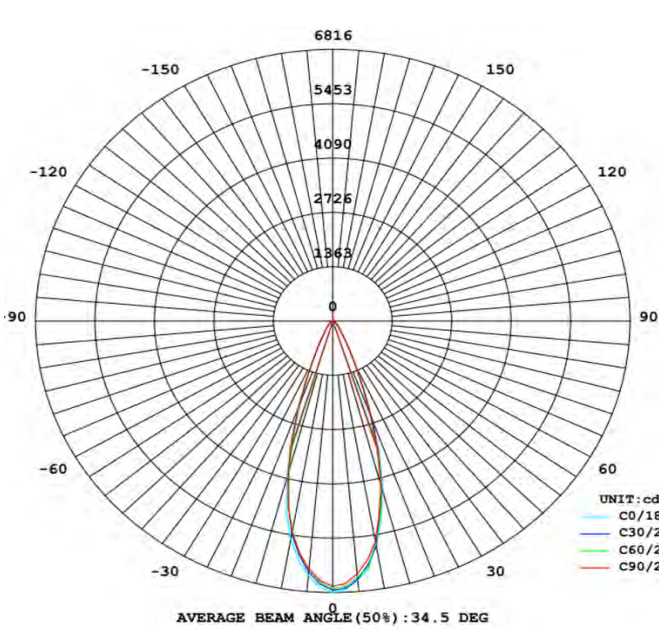

Product Variants TL-DLKML-01, Beam Angle: 90°, CRI: 80, IP44 / IP65

Product Code	Wattage	Lumen	Efficiency	CCT	Size /Cutout (mm)
TL-DLKML-01-9	9W	900lm	100 lm/W	3000K/6500K	Φ103*58mm/90mm
TL-DLKML-01-15	15W	1500lm	100 lm/W	3000K/6500K	Φ144*71mm/125mm
TL-DLKML-01-20	20W	2000lm	100 lm/W	3000K/6500K	Φ144*71mm/125mm
TL-DLKML-01-30	30W	3000lm	100 lm/W	3000K/6500K	Φ183*80mm/160mm
TL-DLKML-01-40	40W	4000lm	100 lm/W	3000K/6500K	Φ183*80mm/160mm
TL-DLKML-01-50	50W	5000lm	100 lm/W	3000K/6500K	Φ226*96mm/200mm

Product Variants TL-DLKML-02, Beam Angle: 60°, CRI: 80 / CRI:90, IP44 / IP65

Product Code	Wattage	Lumen	Efficiency	CCT	Size /Cutout (mm)
TL-DLKML-02-9	9W	900lm	100 lm/W	3000K/6500K	Φ103*58mm/90mm
TL-DLKML-02-15	15W	1500lm	100 lm/W	3000K/6500K	Φ144*71mm/125mm
TL-DLKML-02-20	20W	2000lm	100 lm/W	3000K/6500K	Φ144*71mm/125mm
TL-DLKML-02-30	30W	3000lm	100 lm/W	3000K/6500K	Φ183*80mm/160mm
TL-DLKML-02-40	40W	4000lm	100 lm/W	3000K/6500K	Φ183*80mm/160mm
TL-DLKML-02-50	50W	5000lm	100 lm/W	3000K/6500K	Φ226*96mm/200mm

Product Variants TL-DLKML-03, Beam Angle: 34°,36°,38°, CRI: 80 / CRI:90, IP20

Product Code	Wattage	Lumen	Efficiency	CCT	Size /Cutout (mm)
TL-DLKML-03-9	9W	900lm	100 lm/W	3000K/6500K	Φ103*58mm/90mm
TL-DLKML-03-15	15W	1500lm	100 lm/W	3000K/6500K	Φ144*71mm/125mm
TL-DLKML-03-20	20W	2000lm	100 lm/W	3000K/6500K	Φ144*71mm/125mm
TL-DLKML-03-30	30W	3000lm	100 lm/W	3000K/6500K	Φ183*80mm/160mm
TL-DLKML-03-40	40W	4000lm	100 lm/W	3000K/6500K	Φ183*80mm/160mm
TL-DLKML-03-50	50W	5000lm	100 lm/W	3000K/6500K	Φ226*96mm/200mm

