



TL-FLKHRD



Flood light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80 @ 60,000 hours)

Body Type: Aluminium

Diffuser: PC

Light Source: Philips / Cree

Driver: Meanwell, Philips or Equivalent

Lumen: 150 lm/W

Input Voltage: 85 - 295V

Driver Protection: Class I

Operating Temperature: - 20°C + 60°C

Beam Angle: 10° / 25° / 60°

Body Color: Black

Dimmable: On Request

On Request: Other Wattage & Dimension Variants



TL-FLKHRD-01




TL-FLKHRD-02

Product Variants

| Product Code | Wattage | Lumen | Efficiency | CCT | Dimension (mm) |
|-------------------|---------|-----------|------------|---------------------|----------------|
| TL-FLKHRD-01-600 | 600W | 90000 lm | 150 lm/W | 3000K/ 4000K /6000K | 632x460x270 |
| TL-FLKHRD-01-1200 | 1200W | 180000 lm | 150 lm/W | 3000K/ 4000K /6000K | 792x620x270 |
| TL-FLKHRD-02-600 | 600W | 90000 lm | 150 lm/W | 3000K/ 4000K /6000K | 632x460x270 |
| TL-FLKHRD-02-1200 | 1200W | 180000 lm | 150 lm/W | 3000K/ 4000K /6000K | 792x620x270 |

Beam Angle: 25°

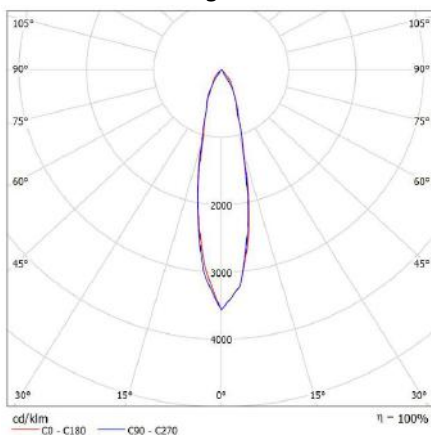

Beam Angle: 60°

