



TL-GRSYL



Ground Recessed mounted fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80 @ 50,000 hours)

Body Type: Die cast aluminium & Stainless Steel ring

Diffuser: Tempered Glass

Light Source: Philips, Cree or Equivalent

Driver: Meanwell or Equivalent

Input Voltage: 220 - 240V

Driver Protection: Class I

Operating Temperature: - 20°C to + 55°C

Beam Angle: 1x60°, 2x60°, 4x60°, 12x15°.


Body Color: Black RAL9005 + SS

Dimmable: Dali


On Request: Other Wattage & Dimension Variants



TL-GRSYL-01 3W, 1x60°

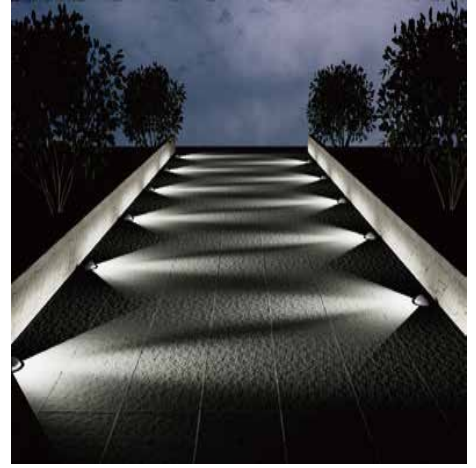

TL-GRSYL-02 4W, 2x60°

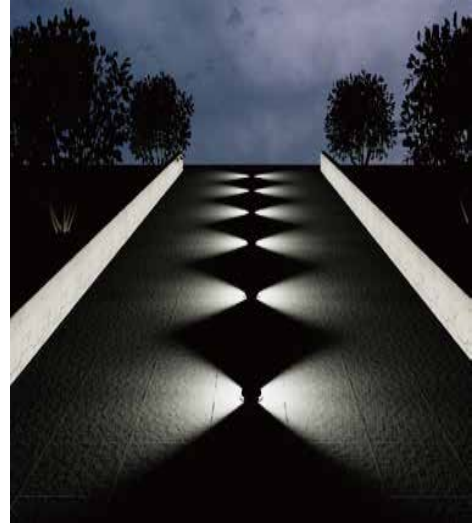

TL-GRSYL-03 4W, 4x60°



TL-GRSYL-04 4W, 12x15°

