



TL-PNTKNLG1



Modern Pendant light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L70 @ 60,000 hours)

Light Source: Cree COB or Equivalent

Driver: Tridonic, Philips or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Frame Color: Chrome + Acrylic

IP Rating: IP20

On Request: Other Wattage & Dimension Variants



PHILIPS
TRIDONIC
CREE 

TEMPLUX

Templux Lighting s.r.l, Via Gradenigo 58, PD35100, Italy, info@templuxitaly.com, www.templuxitaly.com

TL-PNTKNLG1-01
8.5W LED 4000K
800 LUMENS
Diameter: 21 CM
Height: 120 cm




TL-PNTKNLG1-02
25W LED 4000K
2400 LUMENS
Diameter: 38 CM
Height: 120 cm



TL-PNTKNLG1-03
42W LED 4000K
4000 LUMENS
Diameter: 51 CM
Height: 120 cm



TL-PNTKNLG1-04
59W LED 4000K
5600 LUMENS
Diameter: 55 CM
Height: 120 cm

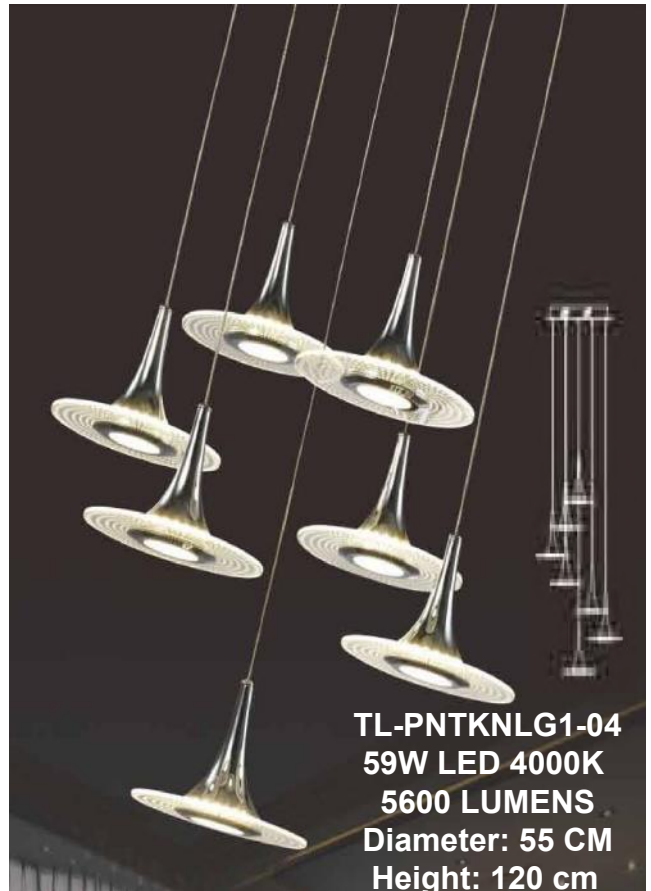

TEMPLUX