



TL-PRRSLT



Recessed mounted Profile light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B20 @ 50,000 hours)

Body Type: Aluminium

Diffuser: Clear or Opal Polycarbonate

Light Source: Tridonic, Osram or Equivalent

Driver: Tridonic, Philips or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 35°C

Beam Angle: 60° & other on Request.

Body Color: White, Black or Grey

IP Rating: IP20

Dimmable: Dali

On Request: Other Wattage & Customized Profile Lengths





TRIDONIC
OSRAM





Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension
TL-PRRSLT-01-26	26W	2000 lm	77 lm/W	3000K/6500K	L1000xW56xH40MM
TL-PRRSLT-01-55	55W	4200 lm	77 lm/W	3000K/6500K	L2000xW56xH40MM
TL-PRRSLT-01-80	80W	6700 lm	77 lm/W	3000K/6500K	L3000xW56xH40MM

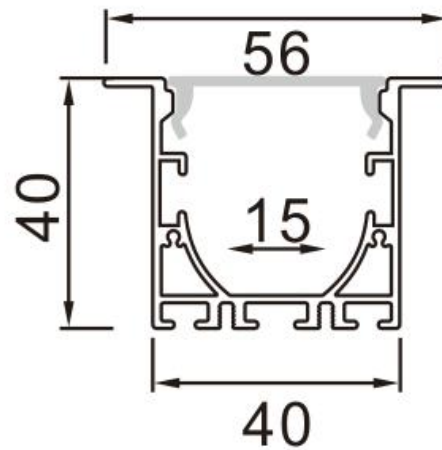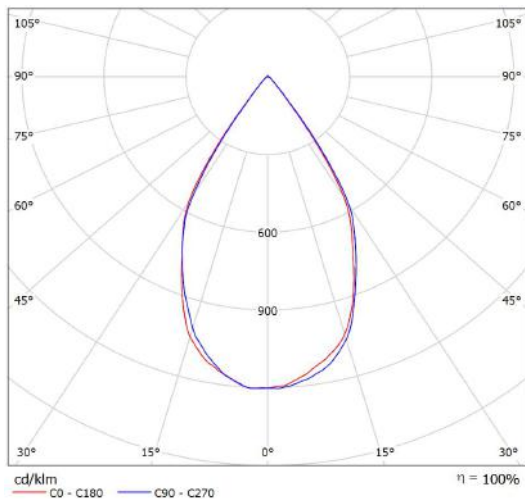



Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension
TL-PRRSLT-02-26	26W	2000 lm	77 lm/W	3000K/6500K	L1000xW40xH40MM
TL-PRRSLT-02-55	55W	4200 lm	77 lm/W	3000K/6500K	L2000xW40xH40MM
TL-PRRSLT-02-80	80W	6700 lm	77 lm/W	3000K/6500K	L3000xW40xH40MM

