



TL-RDFMAD3



Recessed Mounted Adjustable Downlight light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B20 @ 50,000 hours)

Body Type: Steel or Die Cast Aluminium

Diffuser: PC

Light Source: Cree or Equivalent

Driver: Tridonic, Philips or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Fixture Adjustable Angle: 25°

Beam Angle: 24°, 38° & other angles on Request.

Body Color: White or Black.

IP Rating: IP40

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT

On Request: Other Wattage & Dimension Variants




PHILIPS
TRIDONIC
CREE 





Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Beam Angle	Dimension (ØxH) / Cut Out mm
TL-RDFMAD3-5W	5W	600lm	120lm/W	2700K - 6000K	24°	Ø90xH55 / Ø70 mm
TL-RDFMAD3-7W	7W	840lm	120lm/W	2700K - 6000K	24°	Ø95xH80 / Ø80 mm
TL-RDFMAD3-10W	10W	1200lm	120lm/W	2700K - 6000K	24°	Ø115xH80 / Ø100 mm
TL-RDFMAD3-15W	15W	1800lm	120lm/W	2700K - 6000K	24°	Ø140xH95 / Ø120 mm
TL-RDFMAD3-20W	20W	2400lm	120lm/W	2700K - 6000K	24°	Ø160xH85 / Ø140 mm
TL-RDFMAD3-25W	25W	3000lm	120lm/W	2700K - 6000K	24°	Ø160xH85 / Ø140 mm
TL-RDFMAD3-30W	30W	3600lm	120lm/W	2700K - 6000K	24°, 38°	Ø170xH105 / Ø150 mm
TL-RDFMAD3-50W	50W	6000lm	120lm/W	2700K - 6000K	24°, 38°	Ø220xH125 / Ø200 mm

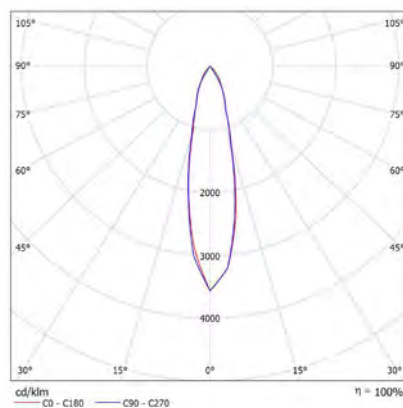

Beam Angle: 24°

