



TL-SMDLPS1



Ceiling or Wall mounted fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80 @ 72,000 hours)

Body Type: PC

Diffuser: PC

Light Source: Tridonic, Philips or Equivalent

Driver: Tridonic, Philips or Equivalent

Input Voltage: 220 - 240V

Driver Protection: Class I

Operating Temperature: - 20°C to + 55°C

Beam Angle: 110°.

Body Color: White / Silver / Gold or any other colors on Request

Dimmable: 1-10V & Dali

Emergency: 1hrs or 3hrs Tridonic Kit

Sensor: Microwave Sensor

On Request: Other Wattage & Dimension Variants




TL-SMDLPS1-01 (WHITE FINISH)



TL-SMDLPS1-02 (GOLD FINISH)



TL-SMDLPS1-03 (SILVER FINISH)

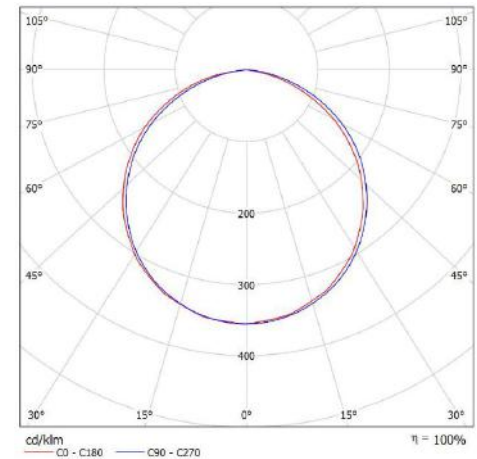

Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (MM)
TL-SMDLPS1-01/02/03-10	10W	1100lm	100 -130 lm/W	3000K/6500K	324x100 MM
TL-SMDLPS1-01/02/03-15	15W	1650lm	100 - 130 lm/W	3000K/6500K	324x100 MM
TL-SMDLPS1-01/02/03-20	20W	2200lm	100 - 130 lm/W	3000K/6500K	324x100 MM
TL-SMDLPS1-01/02/03-25	25W	2750lm	100 - 130 lm/W	3000K/6500K	324x100 MM
TL-SMDLPS1-01/02/03-30	30W	3300lm	100 - 130 lm/W	3000K/6500K	324x100 MM
TL-SMDLPS1-01/02/03-35	35W	4000lm	100 - 130 lm/W	3000K/6500K	324x100 MM

