



TL-SMTLFM1



Surface Mounted Adjustable downlight light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B20 @ 50,000 hours)

Body Type: Aluminium Die Cast

Diffuser: PC

Light Source: Cree

Driver: Philips or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 5°C + 40°C

Beam Angle: 12° or 24° or 36°

Finish: White, Black or Customized

IP Rating: IP20



PHILIPS
TRIDONIC
CREE 







TL-SMTLFM1-01



TL-SMTLFM1-02



CREE 20W 3000K 24°

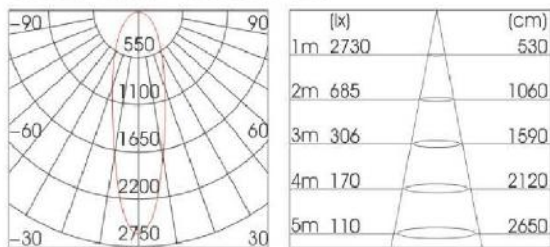

Product Variants

Product Code	Wattage(W)	Lumen(lm)	Efficiency	CCT	Beam Angle	Size (D*H)mm
TL-SMTLFM1-01-10	10W	1000lm	100 lm/W	3000K/6000K	12°/24° /38°	75*H83
TL-SMTLFM1-01-20	20W	2000lm	100 lm/W	3000K/6000K	12°/24° /38°	100*H103
TL-SMTLFM1-02-10	10W	1000lm	100 lm/W	3000K/6000K	12°/24° /38°	75*75*H83
TL-SMTLFM1-02-20	20W	2000lm	100 lm/W	3000K/6000K	12°/24° /38°	100*100*H103

