

TL-SPFM1



Recessed Mounted Spot light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L70 @ 60,000 hours)

Body Type: Aluminium Die Cast

Diffuser: PC Clear or Frosted

Light Source: Cree COB or Equivalent

Driver: Tridonic, Philips or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Beam Angle: 24°, 30° & 60°

Frame Color: White or Black

IP Rating: IP54

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT

On Request: Other Wattage & Dimension Variants



PHILIPS
TRIDONIC
CREE 





TL-SPFM1-01



TL-SPFM1-02



TL-SPFM1-03



TL-SPFM1-04



TL-SPFM1-05




TL-SPFM1-06

Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (LxH) / Cut out (mm)
TL-SPFM1-01	7W	700lm	100lm/W	3000K/6500K	Ø84xH56 / Ø75mm
TL-SPFM1-02	7W	700lm	100lm/W	3000K/6500K	84x84xH56 / 75mm
TL-SPFM1-03	9W	900lm	100lm/W	3000K/6500K	Ø80xH52.5 / Ø75mm
TL-SPFM1-04	9W	900lm	100lm/W	3000K/6500K	Ø87xH55 / Ø70mm
TL-SPFM1-05	9W	900lm	100lm/W	3000K/6500K	80x80x52.5 / 70mm
TL-SPFM1-06	9W	900lm	100lm/W	3000K/6500K	Ø83.5xH91 / 70mm

9W 30°

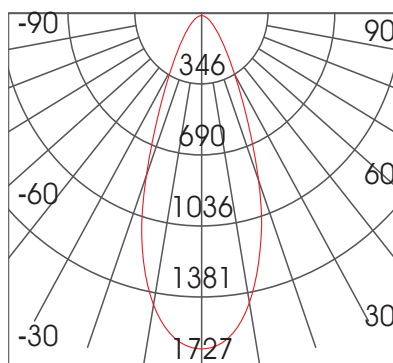

7W 24°

