



TL-TRLLIWL1



Suspended or Surface mounted fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 60,000 hours)

Body Type: Aluminium

Diffuser: Pc

Light Source: Philips or Equivalent

Driver: Tridonic, Philips or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Beam Angle: 120° & other on Request.

Body Color: White, Black or Grey

IP Rating: IP40


Dimmable: Dali

On Request: Other Wattage & Customized Profile Lengths



PHILIPS
TRIDONIC
CREE 



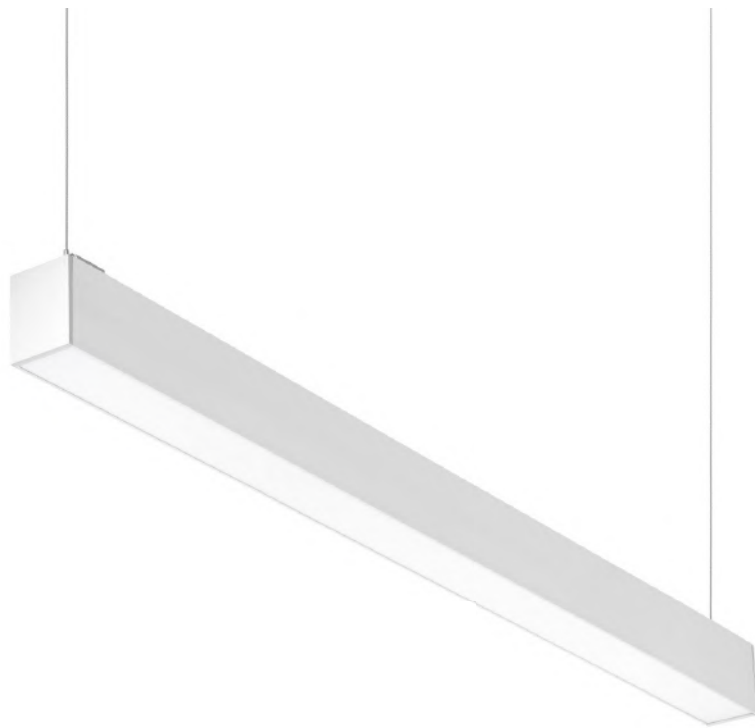

Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension
TL-TRLLIWL1-01	30W	3000 lm	100lm/W	3000K/6500K	L1200xW50xH75MM
TL-TRLLIWL1-02	40W	4000 lm	100lm/W	3000K/6500K	L1200xW50xH75MM
TL-TRLLIWL1-03	50W	5000 lm	100lm/W	3000K/6500K	L1200xW50xH75MM
TL-TRLLIWL1-04	60W	6000 lm	100lm/W	3000K/6500K	L1200xW50xH75MM

