



TL-WLBK



Wall mounted fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L70 @ 60,000 hours)

Body Type: Die cast aluminium /Stainless Steel

Diffuser: Glass / PC

Light Source: Osram or Philips or Equivalent

Driver: Meanwell or Philips or Equivalent

System Lumens: 110 - 130 LM/W

Color Temperature: 3000K / 4000K / 5000K / 5700K

Input Voltage: 100 - 277V

Driver Protection: Class I

Operating Temperature: - 20°C to + 55°C

Body Color: Black / Grey / any other colors on request



Dimmable: 1-10V & Dali

On Request: Other Wattage & Dimension Variants




TL-WLBK-01

INPUT POWER: 40W / 60W / 80W / 100W


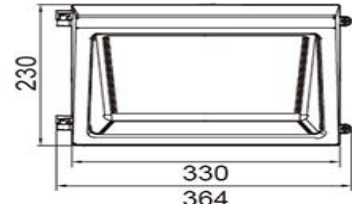


BEAM ANGLE: 88°X100°

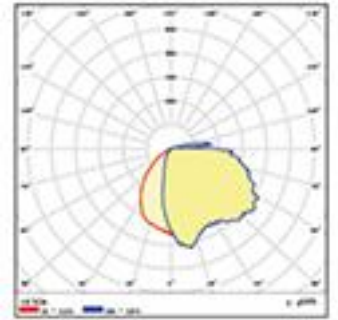


TL-WLBK-02


INPUT POWER: 40W / 60W / 80W / 100W




TYPE: 1



TYPE: 2



TYPE: 3



TL-WLBK-03

INPUT POWER: 25W / 35W

