



TL-WPFL



Weatherproof Ceiling or wall or Suspended fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L70 @ 60,000 hours)

Body / Diffuser : Plastic / PC

Light Source: Bridgelux led 130 lm/W or Philips or Tridonic

Driver: Philips or Tridonic or Meanwell

Input Voltage: 200- 240V, 50-60 HZ

Driver Protection: Class I

Operating Temperature: - 20°C + 55°C

Beam Angle: 120°.

Body Color: White


Dimmable: 1-10V & Dali

Sensor: Microwave Sensor

Linkable Easy fixing Connectors on Both Sides

On Request: Other Wattage & Dimension Variants



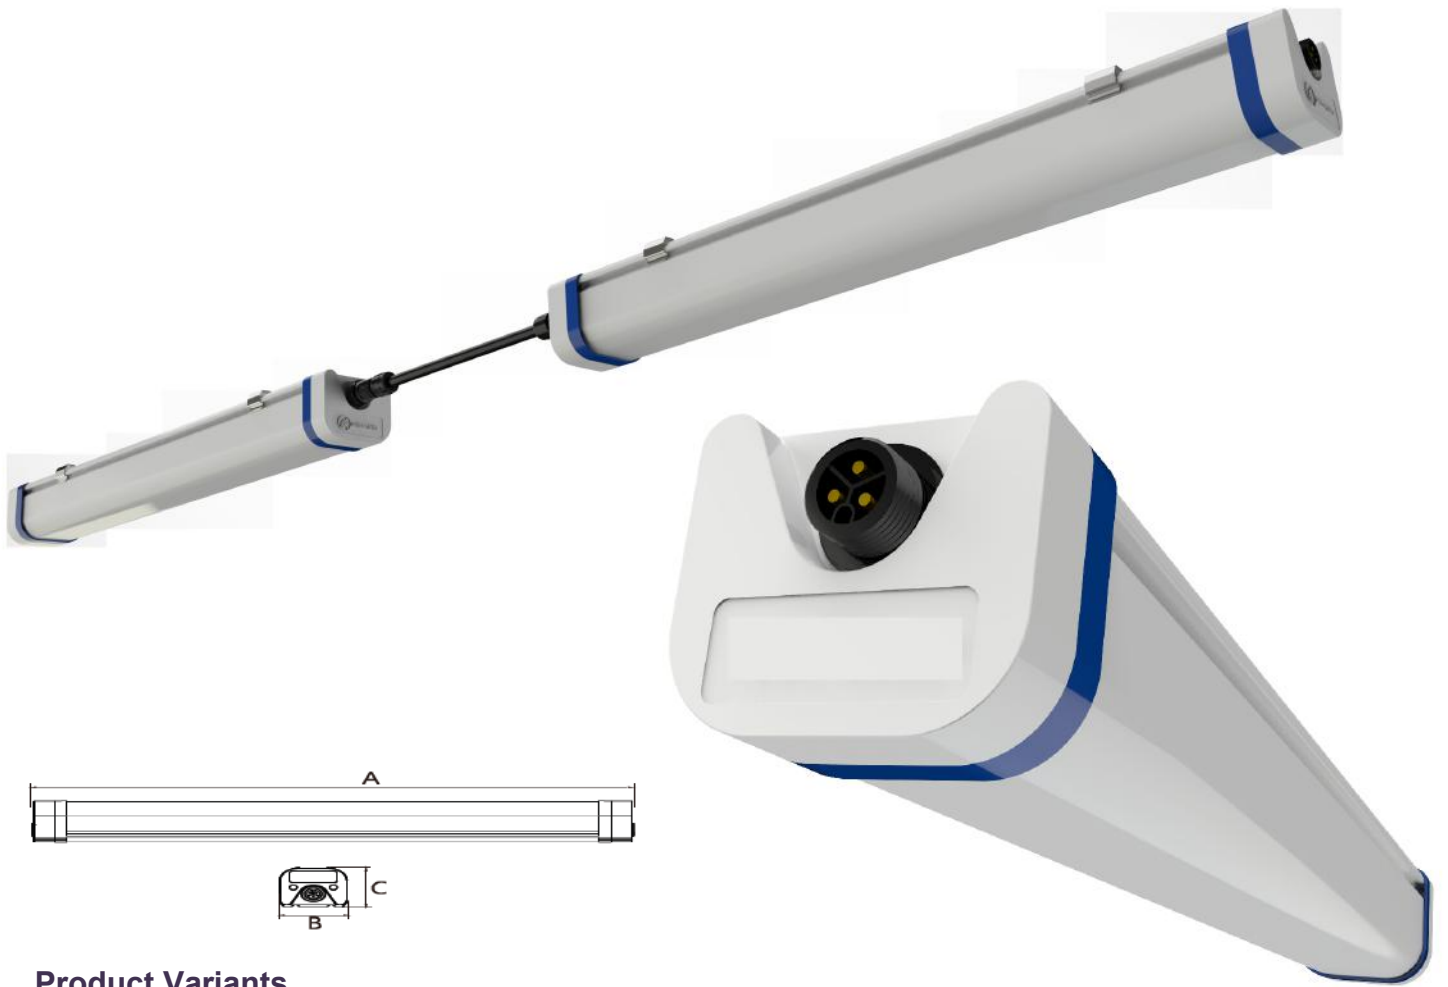

Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (AXBXC)
TL-WPFL-20	20W	2600 lm	130lm/W	3000K/6000K	588X70X60MM
TL-WPFL-40	40W	5200 lm	130lm/W	3000K/6000K	1150X70X60MM
TL-WPFL-60	60W	7800 lm	130lm/W	3000K/6000K	1431X70X60MM

