



TL-STPFLX



Flexible Led Strips material with high light transmittance, environmental silicone material, integrated extrusion molding technology IP65. Unique Optical light distribution structure with uniform lighting surface and without Shadow. Environmental features are resistance to saline solutions, acids, alkali, corrosive gases & UV.

Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90 B10 @ 50,000 hours) Light

Source: Philips Or Epistar Or Osram

Driver: Meanwell Or Tridonic Or Philips

Input Voltage: 220-240V AC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 55°C



Beam Angle: 120 Degree

Dimmable: Dali

IP Rating: IP65, IP67

On Request: Other Wattage & Dimension Variants



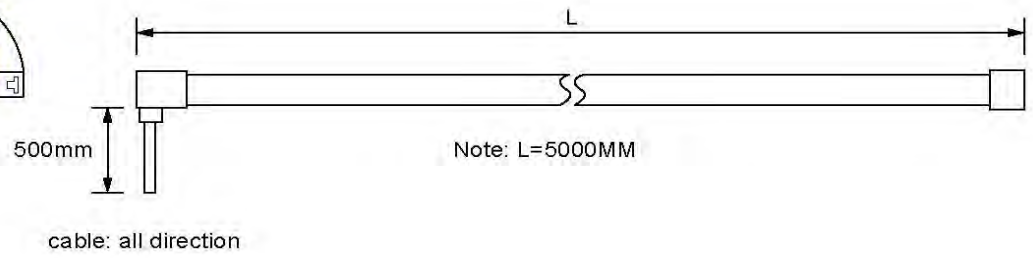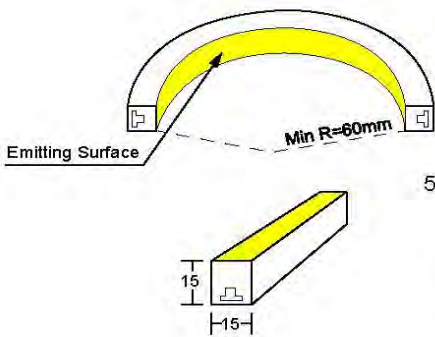

Product Variants

CODE	WATTAGE	COLOR	LUMENS	IP
TL-STPFLX	4W /M	ULTARA WARM WHITE	CUSTOMIZED	65
	9W /M	WARM WHITE	80 - 100 lm/W	67
	14W /M	NATURAL WHITE		
	17W /M	WHITE		
	22W /M	COOL WHITE		
		RED OR GREEN OR BLUE OR YELLOW		
		RGB		

- Acc: 831 - Flat Mounting Aluminium Groove, Size: L1000 x W14.1 x H20mm
- Acc: 832 - Flat Mounting clip, Size: L25 x W14.1 x H20mm
- Acc: 833 - Silica End cap set with End cap & plug
- Acc: 834 - Gum Filler- 10 ml

