



TL-DLIGY-01



Recessed Mounted downlight light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B10 @ 50,000 hours)

Body Type: High Purity Aluminium

Light Source: SMD

Driver: Templux

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 40°C

Beam Angle: 50°, 90°


Frame Color: White, Silver

IP Rating: IP20, IP40

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT


On Request: Other Wattage & Dimension Variants

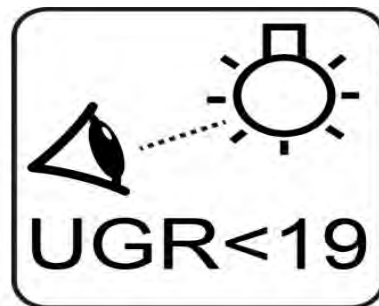



Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Size /Cutout (mm)
TL-DLIGY-01-6W	6W	600lm	100 lm/W	3000K/6000K	Φ95*57 / 68-80
TL-DLIGY-01-10W	10W	1000lm	100 lm/W	3000K/6000K	Φ113*68.5 / 90-102
TL-DLIGY-01-15W	15W	1500lm	100 lm/W	3000K/6000K	Φ145*81.8 / 120-130
TL-DLIGY-01-20W	20W	2000lm	100 lm/W	3000K/6000K	Φ174*88.8 / 145-155
TL-DLIGY-01-28W	28W	2800lm	100 lm/W	3000K/6000K	Φ232*112.8/ 195-210
TL-DLIGY-01-35W	35W	3500lm	100 lm/W	3000K/6000K	Φ232*112.8/ 195-210

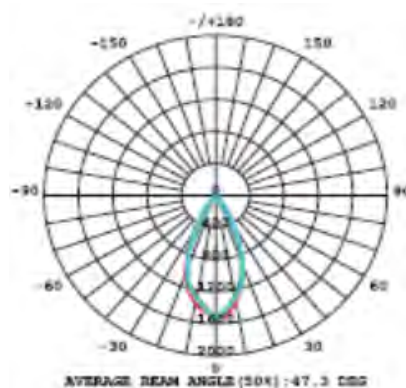



Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Size /Cutout (mm)
TL-DLIGY-02-10W	10W	1000lm	100 lm/W	3000K/6000K	Φ113*55 / 90-98
TL-DLIGY-02-14W	14W	1400lm	100 lm/W	3000K/6000K	Φ143*59 / 117-127
TL-DLIGY-02-18W	18W	1800lm	100 lm/W	3000K/6000K	Φ165*61 / 135-145
TL-DLIGY-02-25W	25W	2500lm	100 lm/W	3000K/6000K	Φ230*75 / 192-210
TL-DLIGY-02-30W	30W	3000lm	100 lm/W	3000K/6000K	Φ230*75/ 192-210
TL-DLIGY-02-40W	40W	4000lm	100 lm/W	3000K/6000K	Φ279*94/ 240-255

