



TL-EXSLFK



Wall mounted fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Die cast aluminium

Diffuser: Glass / PC

Light Source: Tridonic or Philips or Equivalent

Driver: Tridonic or Philips or Equivalent

Input Voltage: 100 - 277V

Driver Protection: Class I

Operating Temperature: - 20°C to + 55°C

Beam Angle: 120°.

Body Color: Black / White / Graphite / any other colors on request

On Request: Other Wattage & Dimension Variants




**PHILIPS
TRIDONIC**







TL-EXSLFK-01-8W/12W
8W LED -840 lm, 12W-1260 lm
2700K-6500K

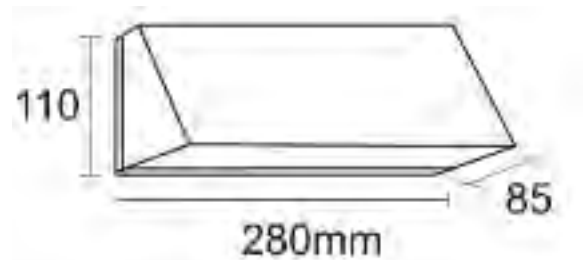

TL-EXSLFK-02-8W/12W
8W LED -840 lm, 12W-1260 lm
2700K-6500K

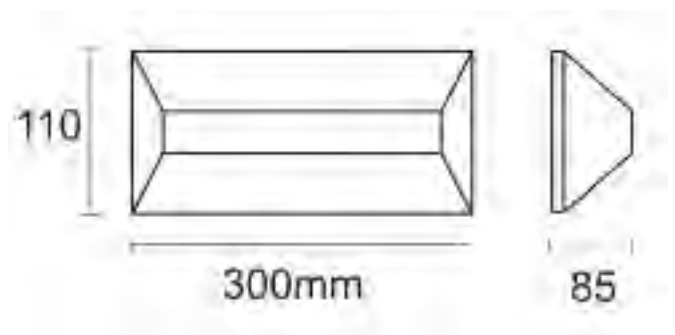

TL-EXSLFK-03-8W/12W
8W LED -840 lm, 12W-1260 lm
2700K-6500K

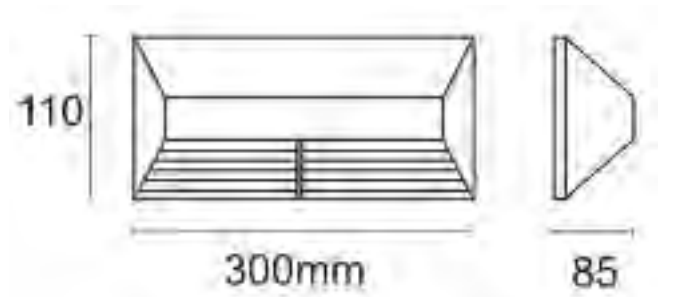


Housing: Die Cast Aluminium
Diffuser: Toughened Glass







TL-EXSLFK-04-6W
6W LED 660 lm
2700K-6500K

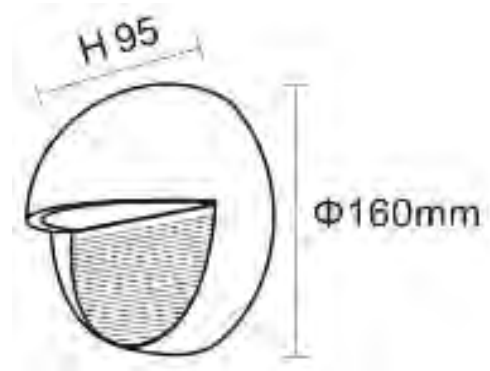

TL-EXSLFK-05-6W
6W LED 660 lm
2700K-6500K

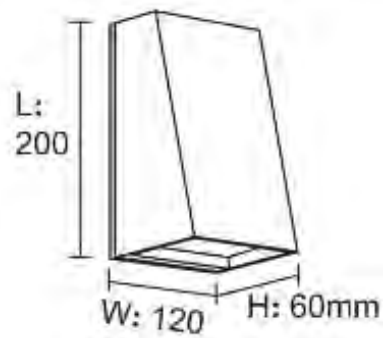

TL-EXSLFK-06-10W/12W
10W LED-1100 lm, W:200
12W LED 1320 lm, W:300
2700K-6500K

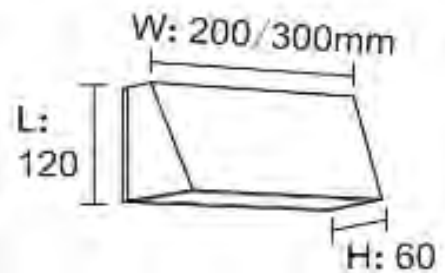

Housing: Die Cast Aluminium
Diffuser: Toughened Glass



TL-EXSLFK-07-A-5W LED -550 lm, 2700K - 6500K, SIZE: 117*33
TL-EXSLFK-07-B-10W LED -1100 lm, 2700K - 6500K, SIZE: 150*33
TL-EXSLFK-07-C-12W LED -1260 lm, 2700K - 6500K, SIZE: 200*33




TL-EXSLFK-08-A-5W LED -550 lm, 2700K - 6500K, SIZE: 117*33
TL-EXSLFK-08-B-10W LED -1100 lm, 2700K - 6500K, SIZE: 150*33
TL-EXSLFK-08-C-12W LED -1260 lm, 2700K - 6500K, SIZE: 200*33



Housing: Die Cast Aluminium
Diffuser: Polycarbonate

TEMPLUX

TL-EXSLFK-09-6W LED -660 lm, 2700K - 6500K

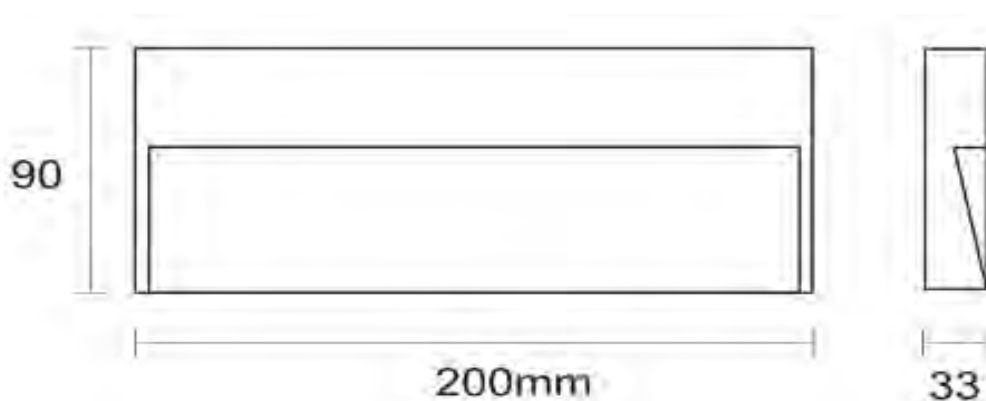

Housing: Die Cast Aluminium
Diffuser: Polycarbonate

