



## TL-EXWLDL



Wall mounted fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B10 @ 50,000 hours)

Body Type: Aluminium Die Casting Body

Diffuser: PC

Light Source: Osram or Philips or Equivalent

Driver: Meanwell or Philips or Equivalent

System Lumens: 100 LM/W

Color Temperature: 3000K / 4000K / 5000K / 6000K

Input Voltage: 220 - 240V

Driver Protection: Class I

Operating Temperature: - 20°C to + 55°C


Body Color: Black / any other colors on request

Dimmable: 1-10V & Dali


On Request: Other Wattage & Dimension Variants




TL-EXWLDL-01-A-8W

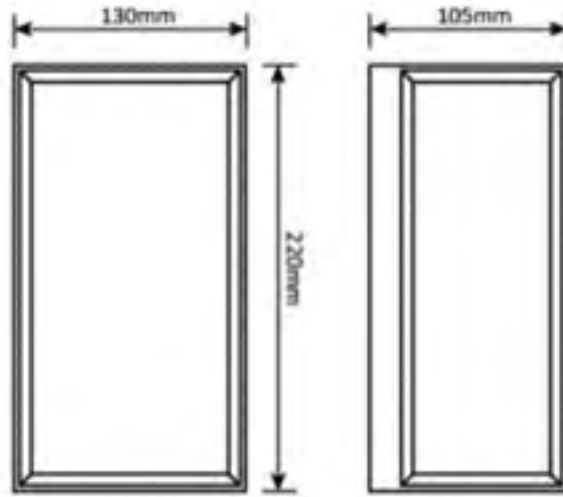

TL-EXWLDL-01-B-10W

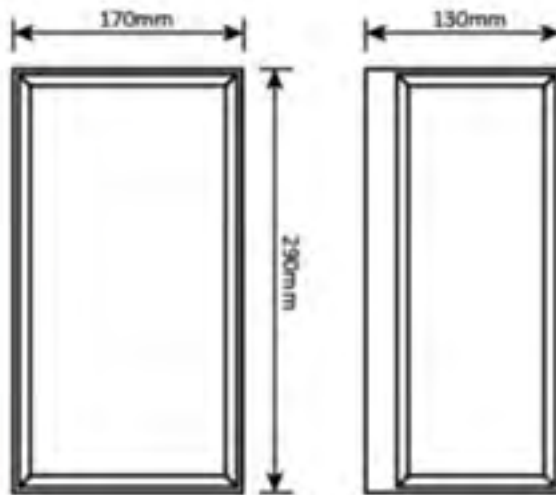


TL-EXWLDL-01-C-13W

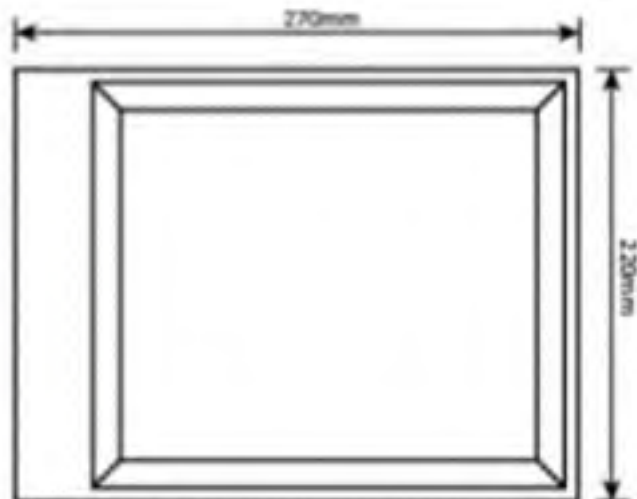




TL-EXWLDL-01-D-13W

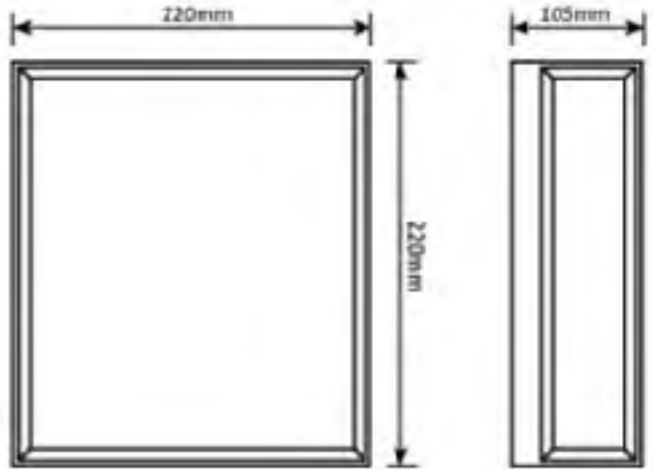


TL-EXWLDL-01-E-20W

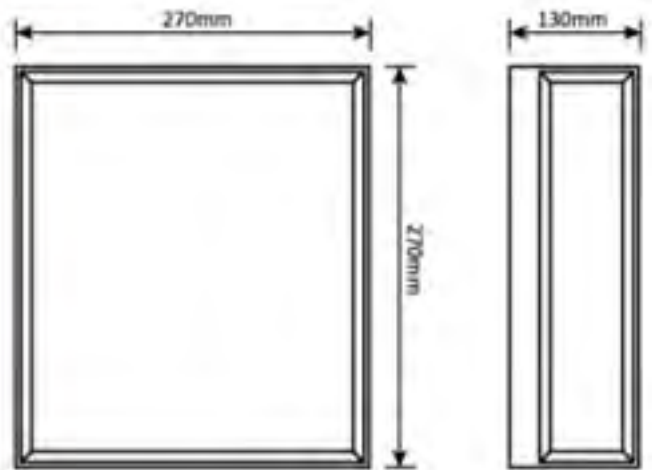





TL-EXWLDL-01-F-8W

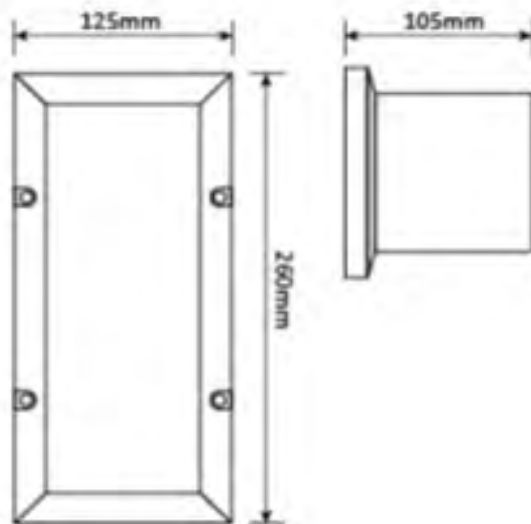


TL-EXWLDL-01-G-8W

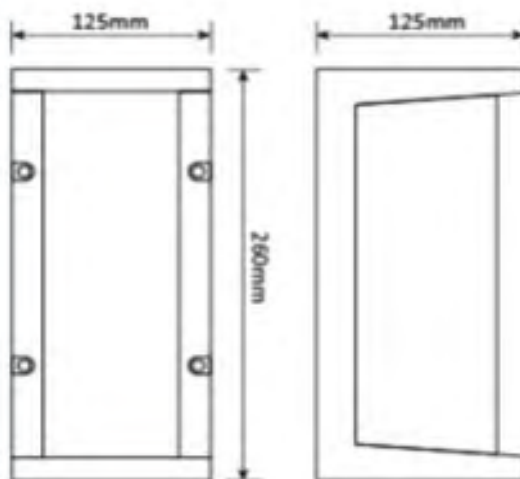


TL-EXWLDL-01-H-8W

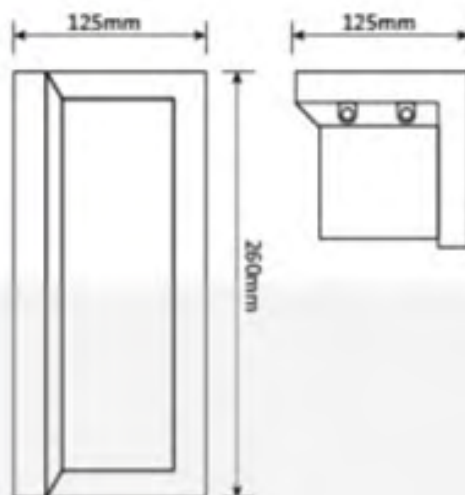


TL-EXWLDL-01-I-8W

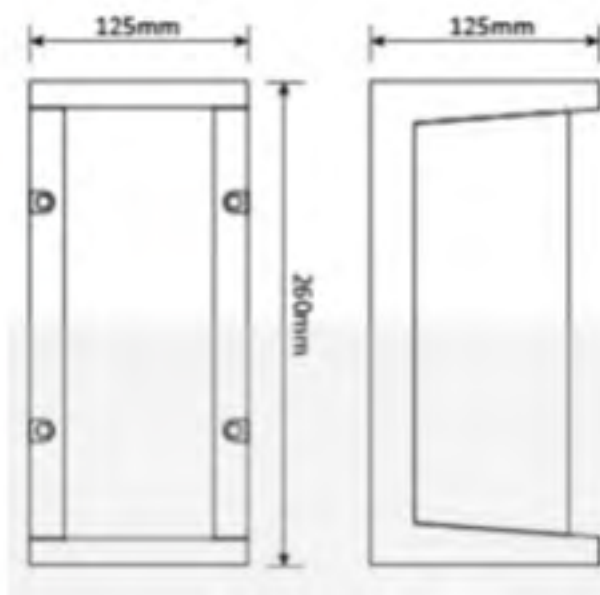

TL-EXWLDL-01-J-5W

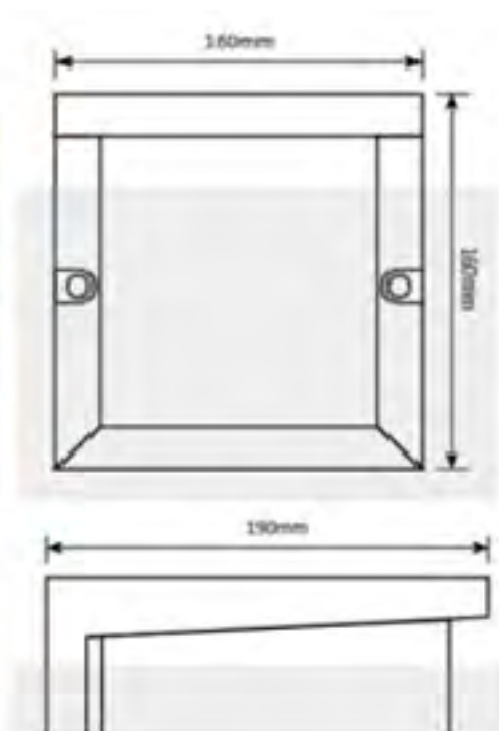

TL-EXWLDL-01-K-8W

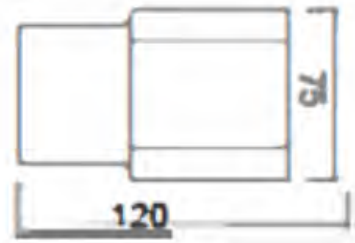

TL-EXWLDL-01-L-4W

