



TL-MRHMR



Mirror light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Aluminium

Diffuser: PC

Light Source: Cree or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Beam Angle: 108°

Body Color: White/Chrome

IP Rating: IP44, IP54



Templux Lighting s.r.l, Via Gradenigo 58, PD35100, Italy, info@templuxitaly.com, www.templuxitaly.com

TL-MRHMR1B-01/02/03




TL-MRHMR1A-01/02/03





Light guide plate



Cabinet top fixing bracket

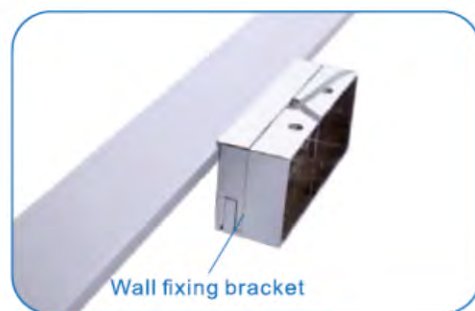

Wall fixing bracket

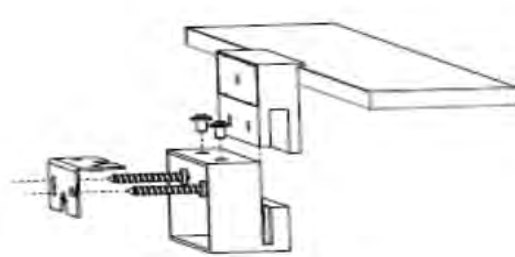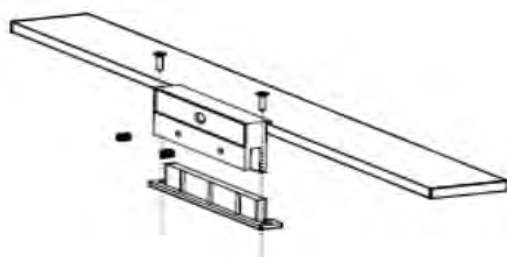

Product Variants

Product Code	Wattage	Beam Angle	Efficiency	CCT	Size
TL-MRHMR1A-01	8W	108°	100 lm/W	3000K - 6000K	400x77x61 mm
TL-MRHMR1A-02	10W	108°	100 lm/W	3000K - 6000K	600x77x61 mm
TL-MRHMR1A-03	12W	108°	100 lm/W	3000K - 6000K	780x77x61 mm
TL-MRHMR1B-01	8W	108°	100 lm/W	3000K - 6000K	400x77x61 mm
TL-MRHMR1B-02	10W	108°	100 lm/W	3000K - 6000K	600x77x61 mm
TL-MRHMR1B-03	12W	108°	100 lm/W	3000K - 6000K	780x77x61 mm







B





A

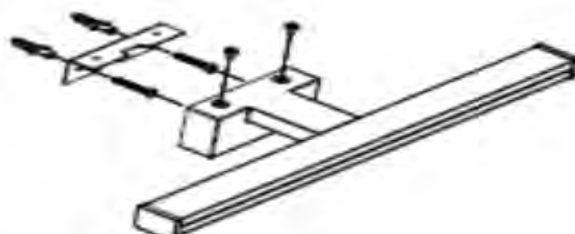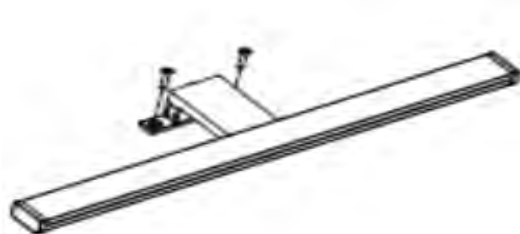

Product Variants

Product Code	Wattage	Beam Angle	Efficiency	CCT	Size
TL-MRHMR2-01-A/B	6W	116°	100 lm/W	3000K - 6000K	350x44x101 mm
TL-MRHMR2-02-A/B	8W	116°	100 lm/W	3000K - 6000K	400x44x101 mm
TL-MRHMR2-03-A/B	12W	116°	100 lm/W	3000K - 6000K	600x44x101 mm
TL-MRHMR2-04-A/B	15W	116°	100 lm/W	3000K - 6000K	780x44x101 mm
TL-MRHMR2-05-A/B	15W	116°	100 lm/W	3000K - 6000K	900x44x101 mm






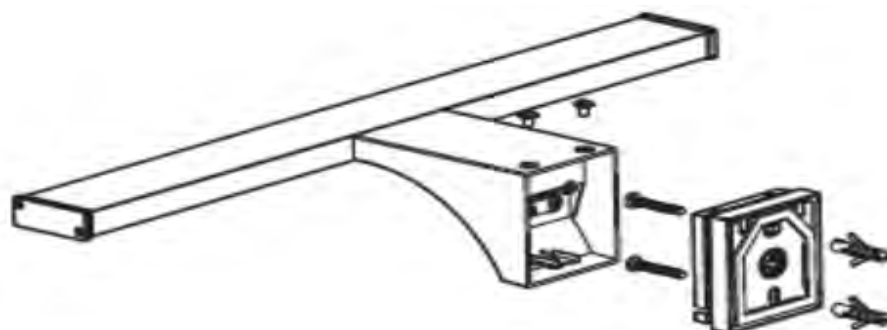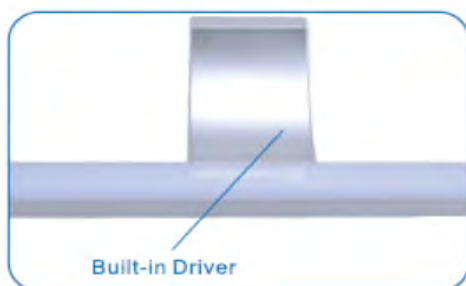

Product Variants

Product Code	Wattage	Beam Angle	Efficiency	CCT	Size
TL-MRHMR3-01	6W	110°	100 lm/W	3000K - 6000K	350x67x141 mm
TL-MRHMR3-02	8W	110°	100 lm/W	3000K - 6000K	400x67x141 mm
TL-MRHMR3-03	12W	110°	100 lm/W	3000K - 6000K	600x67x141 mm
TL-MRHMR3-04	15W	110°	100 lm/W	3000K - 6000K	780x67x141 mm





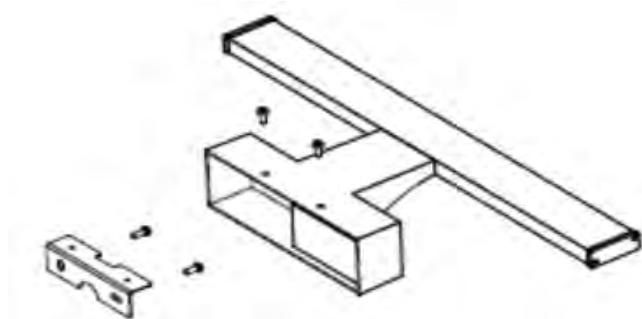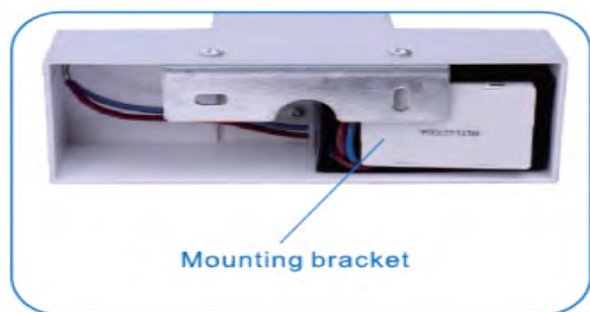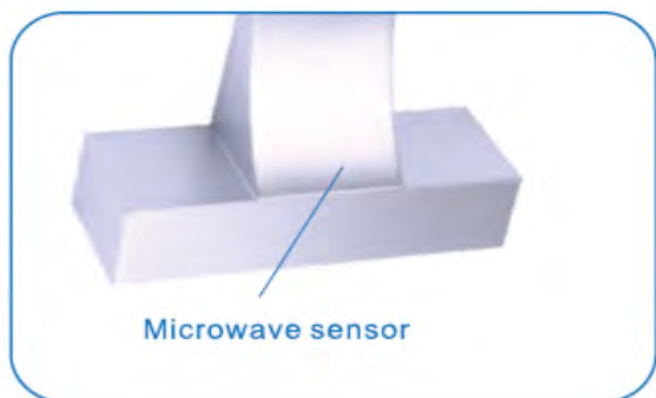

Product Variants

Product Code	Wattage	Beam Angle	Efficiency	CCT	Size
TL-MRHMR4-01	10W	110°	100 lm/W	3000K - 6000K	400x55x151 mm
TL-MRHMR4-02	14W	110°	100 lm/W	3000K - 6000K	600x55x151 mm
TL-MRHMR4-03	17W	110°	100 lm/W	3000K - 6000K	780x55x151 mm
TL-MRHMR4-04	20W	110°	100 lm/W	3000K - 6000K	900x55x151 mm



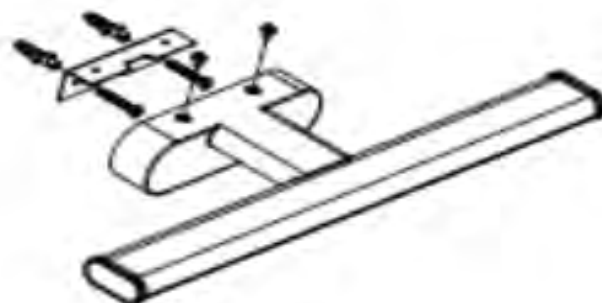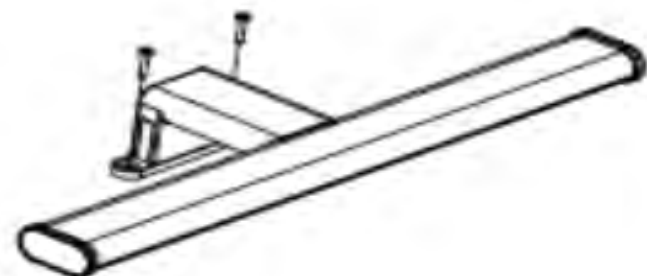

Product Variants

Product Code	Wattage	Beam Angle	Efficiency	CCT	Size
TL-MRHMR5-01-A/B	8W	110°	100 lm/W	3000K - 6000K	400x47x120 mm
TL-MRHMR5-02-A/B	12W	110°	100 lm/W	3000K - 6000K	600x47x120 mm
TL-MRHMR5-03-A/B	15W	110°	100 lm/W	3000K - 6000K	780x47x120 mm
TL-MRHMR5-04-A/B	15W	110°	100 lm/W	3000K - 6000K	900x47x120 mm

