



TL-MRHMRA



Mirror light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Aluminium

Diffuser: PC

Light Source: Cree or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Body Color: White/Chrome

IP Rating: IP44, IP40 with Shaver socket




Templux Lighting s.r.l, Via Gradenigo 58, PD35100, Italy, info@templuxitaly.com, www.templuxitaly.com

TL-MRHMRA1-A-01/02/03



TL-MRHMRA1-B-01/02/03

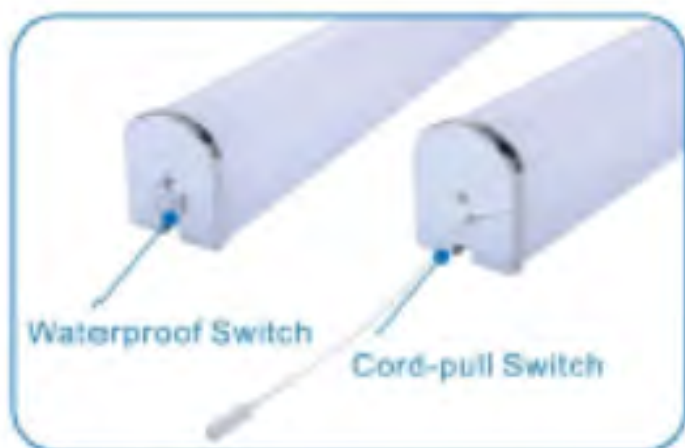

Product Variants

Product Code	Wattage	Beam Angle	Efficiency	CCT	Size
TL-MRHMRA1-A-01	8W	133°	100 lm/W	3000K - 6000K	415x65x53 mm
TL-MRHMRA1-A-02	15W	133°	100 lm/W	3000K - 6000K	605x65x53 mm
TL-MRHMRA1-A-03	20W	133°	100 lm/W	3000K - 6000K	905x65x53 mm
TL-MRHMRA1-B-01	8W	133°	100 lm/W	3000K - 6000K	415x65x53 mm
TL-MRHMRA1-B-02	15W	133°	100 lm/W	3000K - 6000K	605x65x53 mm
TL-MRHMRA1-B-03	20W	133°	100 lm/W	3000K - 6000K	905x65x53 mm





Customized socket



FR DE UK

Rated Power: 2000W Max.
(alternative)



Built-in junction box



Clip

Product Variants

Product Code	Wattage	Beam Angle	Efficiency	CCT	Size
TL-MRHMRA2-01	8W	133°	100 lm/W	3000K - 6000K	495x66x59 mm
TL-MRHMRA2-02	15W	133°	100 lm/W	3000K - 6000K	685x66x59 mm
TL-MRHMRA2-03	20W	133°	100 lm/W	3000K - 6000K	985x66x59 mm





Product Variants

Product Code	Wattage	Beam Angle	Efficiency	CCT	Size
TL-MRHMRA3-01	6W	145°	100 lm/W	3000K - 6000K	400x69x52 mm
TL-MRHMRA3-02	15W	145°	100 lm/W	3000K - 6000K	600x69x52 mm
TL-MRHMRA3-03	20W	145°	100 lm/W	3000K - 6000K	900x69x52 mm





Product Variants

Product Code	Wattage	Beam Angle	Efficiency	CCT	Size
TL-MRHMRA4-01	5W	120°	100 lm/W	3000K - 6000K	304x43x46 mm
TL-MRHMRA4-02	6W	120°	100 lm/W	3000K - 6000K	404x43x46 mm
TL-MRHMRA4-03	7W	120°	100 lm/W	3000K - 6000K	454x43x46 mm
TL-MRHMRA4-04	15W	120°	100 lm/W	3000K - 6000K	604x43x46 mm
TL-MRHMRA4-05	18W	120°	100 lm/W	3000K - 6000K	774x43x46 mm
TL-MRHMRA4-06	20W	120°	100 lm/W	3000K - 6000K	904x43x46 mm
TL-MRHMRA4-07	20W	120°	100 lm/W	3000K - 6000K	1004x43x46 mm





Customized socket



FR DE UK

Rated Power: 2000W Max.
(alternative)



Socket is replaceable



Waterproof Switch



chrome

black

silver

Product Variants

Product Code	Wattage	Beam Angle	Efficiency	CCT	Size
TL-MRHMRA5-01-IP44	6W	140°	100 lm/W	3000K - 6000K	494x70x55 mm
TL-MRHMRA5-02-IP44	15W	140°	100 lm/W	3000K - 6000K	684x70x55 mm
TL-MRHMRA5-03-IP44	20W	140°	100 lm/W	3000K - 6000K	984x70x55 mm

