



TL-SMCYFK1



Surface Mounted downlight light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Aluminium Die Cast

Diffuser: PC in White / Black / Specular Silver Reflector Choice

Light Source: Cree, Samsung

Driver: Philips, Eaglerise or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 5°C + 50°C

Beam Angle: 54°

Finish: White, Black, Grey

IP Rating: IP65

Optional Dali Dimmable Driver




PHILIPS
TRIDONIC
CREE 





Φ140/180/230mm

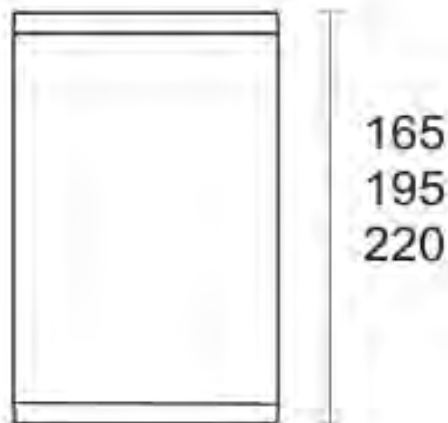

Product Variants

Product Code	Wattage(W)	Lumen(lm)	Efficiency	CCT	Beam Angle	Size (D*H)mm
TL-SMCYFK1-01	20W	2200lm	110 lm/W	3000K/6000K	54°	140*H165
TL-SMCYFK1-02	30W	3300lm	110 lm/W	3000K/6000K	54°	180*H195
TL-SMCYFK1-03	30W	3300lm	110 lm/W	3000K/6000K	54°	230*H220
TL-SMCYFK1-04	40W	4400lm	110 lm/W	3000K/6000K	54°	230*H220
TL-SMCYFK1-05	50W	5500lm	110 lm/W	3000K/6000K	54°	230*H220

