



TL-SMCYFM2



Surface Mounted downlight light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B10 @ 50,000 hours)

Body Type: Aluminium Die Cast

Diffuser: PC

Light Source: Cree, Samsung

Driver: Philips, Eaglerise or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 5°C + 40°C

Beam Angle: 19°, 80°

Finish: White

IP Rating: IP54, IP65




PHILIPS
TRIDONIC
CREE 



TL-SMCYFM2-R



TL-SMCYFM2-S

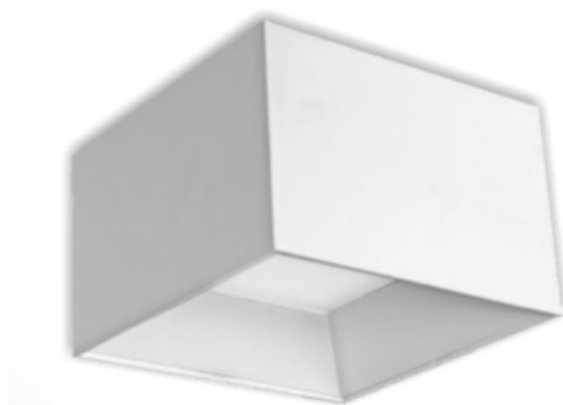


Product Variants

Product Code	Wattage(W)	Lumen(lm)	Efficiency	CCT	Beam Angle	Size (D*H)mm
TL-SMCYFM2-R-10	10W	1000lm	100 lm/W	3000K/6000K	80°	130*H100
TL-SMCYFM2-R-20	20W	2000lm	100 lm/W	3000K/6000K	80°	165*H115
TL-SMCYFM2-R-25	25W	2500lm	100 lm/W	3000K/6000K	80°	200*H130
TL-SMCYFM2-S-25	25W	2500lm	100 lm/W	3000K/6000K	80°	120*120*H93
TL-SMCYFM2-S-30	30W	3000lm	100 lm/W	3000K/6000K	80°	150*150*H103




TL-SMCYFM2-R1-IP54

WHITE/ BLACK/ SILVER




TL-SMCYFM2-S1-IP54

WHITE/ BLACK/ SILVER



CREE 1X 7W 3000K 19°

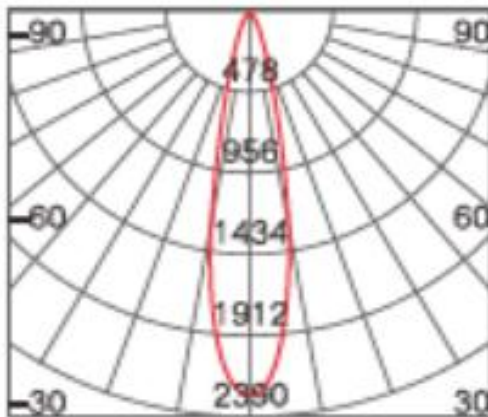

	(lx)	(cm)
1m	2387	103
2m	567	207
3m	265	310
4m	149	413
5m	95	517

Product Variants

Product Code	Wattage(W)	Lumen(lm)	Efficiency	CCT	Beam Angle	Size (D*H)mm
TL-SMCYFM2-R1-7	7W	500lm	72 lm/W	3000K/6000K	19°	90*H95
TL-SMCYFM2-S1-7	7W	500lm	72 lm/W	3000K/6000K	19°	90*H94

