



TL-SMDLFK3



Ceiling or Wall mounted fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: PC

Diffuser: PC

Light Source: Tridonic, Cree or Equivalent

Driver: Tridonic, Philips or Equivalent

Input Voltage: 220 - 240V

Driver Protection: Class I

Operating Temperature: - 5°C to + 40°C

Beam Angle: 120°.

Body Color: White


Dimmable: 1-10V & Dali

Emergency: 1hrs or 3hrs Tridonic Kit

Sensor: Microwave Sensor on Request

On Request: Other Wattage & Dimension Variants



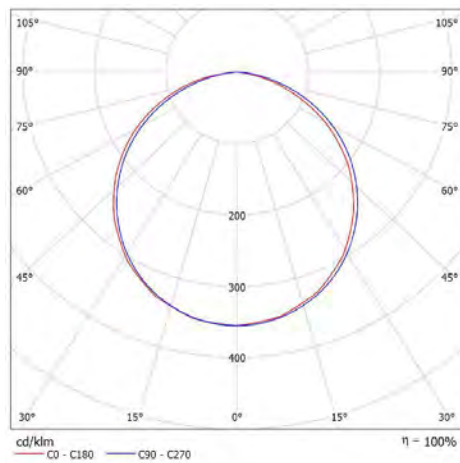

Product Variants

| Product Code | Wattage | Lumen | Efficiency | CCT | Dimension (DxH MM) |
|-------------------|---------|--------|------------|-------------|--------------------|
| TL-SMDLFK3-01-15W | 15W | 1500lm | 100 lm/W | 3000K/6500K | 280x70 MM |
| TL-SMDLFK3-02-18W | 18W | 1800lm | 100 lm/W | 3000K/6500K | 280x70 MM |
| TL-SMDLFK3-03-25W | 25W | 2500lm | 100 lm/W | 3000K/6500K | 330x70 MM |
| TL-SMDLFK3-04-32W | 32W | 3200lm | 100 lm/W | 3000K/6500K | 360x70 MM |

