



## TL-WLBKFK2



Wall mounted fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Die cast aluminium

Diffuser: Polycarbonate/Glass

Light Source: Tridonic or Philips or Equivalent

Driver: Tridonic or Philips or Equivalent

Input Voltage: 100 - 277V

Driver Protection: Class I

Operating Temperature: - 20°C to + 55°C

Beam Angle: 120°.

Body Color: Black / White / Graphite / any other colors

On request Dimmable: 1-10V & Dali


On Request: Other Wattage & Dimension Variants



**PHILIPS  
TRIDONIC**



TL-WLBKFK2-01-A 30W LED 3300 lm, Size: 198\*140\*140  
TL-WLBKFK2-01-B 40W LED 4400 lm, Size: 198\*140\*140  
TL-WLBKFK2-01-C 50W LED 5500 lm, Size: 363\*230\*195  
TL-WLBKFK2-01-D 70W LED 7700 lm, Size: 363\*230\*195  
TL-WLBKFK2-01-E 90W LED 9900 lm, Size: 450\*250\*220  
TL-WLBKFK2-01-F 120W LED 13200 lm, Size: 450\*250\*220

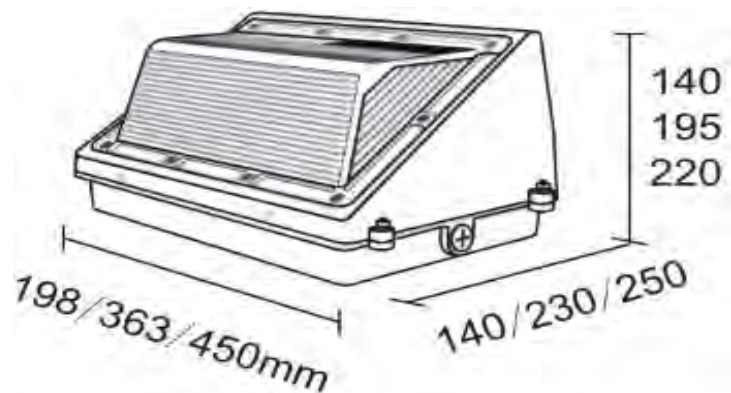


CCT: 2700K, 3000K, 4000K, 5000K, 6500K

Housing: Die Cast Aluminium with high Corrosion Resistant

Diffuser: UV Stain Transparent Polycarbonate



TL-WLBKFK2-02-A 40W LED 4400 lm, CCT: 2700k- 6500K  
TL-WLBKFK2-02-B 60W LED 6600 lm, CCT: 2700k- 6500K  
TL-WLBKFK2-02-C 90W LED 9900 lm, CCT: 2700k- 6500K  
TL-WLBKFK2-02-D 120W LED 13200 lm, CCT: 2700k- 6500K

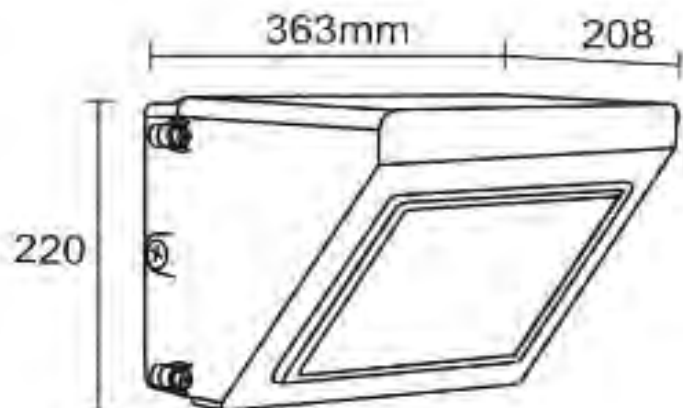

Housing: Die Cast Aluminium with high Corrosion Resistant

Diffuser: Opal Prismatic Polycarbonate



TL-WLBKFK2-03-A 20W LED 2200 lm, Size: 220\*187\*82 MM

TL-WLBKFK2-03-B 30W LED 3300 lm, Size: 310\*265\*122 MM



CCT: 2700K, 3000K, 4000K, 5000K, 6500K

Housing: Die Cast Aluminium with high Corrosion Resistant

Diffuser: Opal / Clear Polycarbonate





TL-WLBKFK2-04-15W / 25W

15W LED 1650 lm,

25W LED 2750 lm


2700K -6500K



TL-WLBKFK2-05-24W

24W LED 2640 lm

2700K -6500K

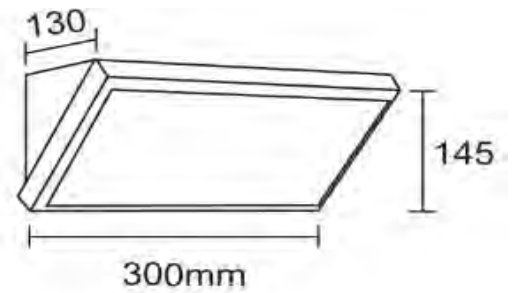

Housing: Die Cast Aluminium with high Corrosion Resistant

Diffuser: Opal Polycarbonate




TL-WLBKFK2-06-A 20W LED 2100 lm, Size: 199\*160\*107

TL-WLBKFK2-06-B 30W LED 3150 lm, Size: 199\*140\*140

TL-WLBKFK2-06-C 50W LED 5250 lm, Size: 298\*242\*163

TL-WLBKFK2-06-D 70W LED 7350 lm, Size: 298\*242\*163

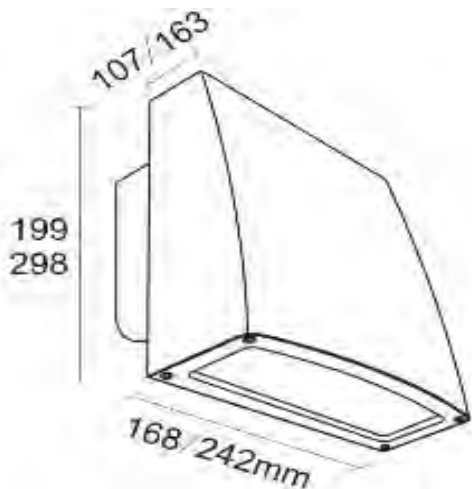

Head can be adjusted 90°

Housing: Die Cast Aluminium with high Corrosion Resistant

Diffuser: Tempered Glass

