



TL-WLIDLFK



Wall mounted decorative fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Die cast aluminium

Diffuser: Opal PC

Light Source: Philips, Cree or Equivalent

Driver: Meanwell, Eaglerise or Equivalent

Input Voltage: 100 - 277V AC

Beam Angle: 360°



Body Color: Graphite / White / Black / Silver



Templux Lighting s.r.l, Via Gradenigo 58, PD35100, Italy, info@templuxitaly.com, www.templuxitaly.com



TL-WLIDLFK-RD-01/02

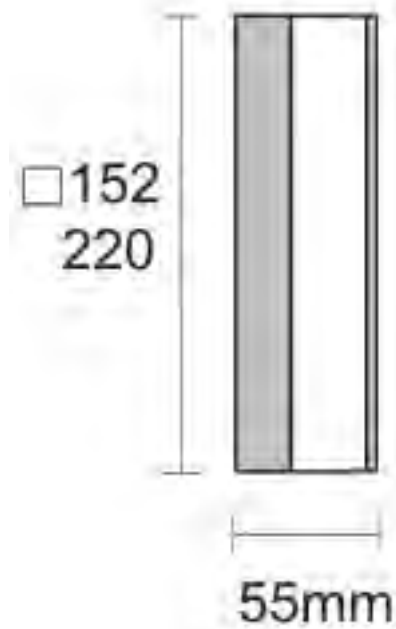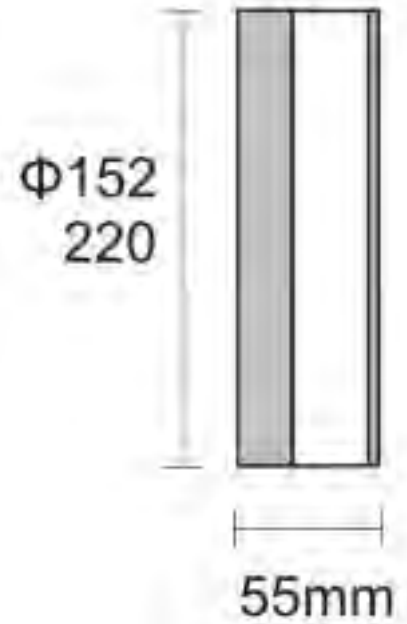

TL-WLIDLFK-SQ-01/02

Product Variants

| Product Code | Wattage | Beam angle | Lumens | CCT | Size (D*H mm) |
|----------------------|---------|------------|---------|--------------|---------------|
| TL-WLIDLFK-RD-01-10W | 10W | 360° | 1100 lm | 3000K, 4000K | 152x55 mm |
| TL-WLIDLFK-RD-02-16W | 16W | 360° | 1980 lm | 3000K, 4000K | 220x55 mm |
| TL-WLIDLFK-SQ-01-12W | 12W | 360° | 1320 lm | 3000K, 4000K | 152x152x55 mm |
| TL-WLIDLFK-SQ-02-16W | 16W | 360° | 1980 lm | 3000K, 4000K | 220x220x55 mm |

