



## TL-FCSYL02



Wall Washer light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Aluminium Alloy body

Diffuser: Tempered Glass

Light Source: Cree or Equivalent

Input Voltage: 220 - 240V

Lumens: 90 - 140 lm/W

Operating Temperature: - 20°C + 55°C

Beam Angle: 3°, 5°, 6°, 8°, 10°, 12°, 15°, 20°, 24°, 30°, 38°, 45°, 60°, 5x20°, 10x45°, 10x60°, 10x70°

Body Color: Grey / Customized



On Request: Other Wattage & Dimension Variants




**CREE**   
**LED Chips**




Templux Lighting s.r.l, Via Gradenigo 58, PD35100, Italy, [info@templuxitaly.com](mailto:info@templuxitaly.com), [www.templuxitaly.com](http://www.templuxitaly.com)

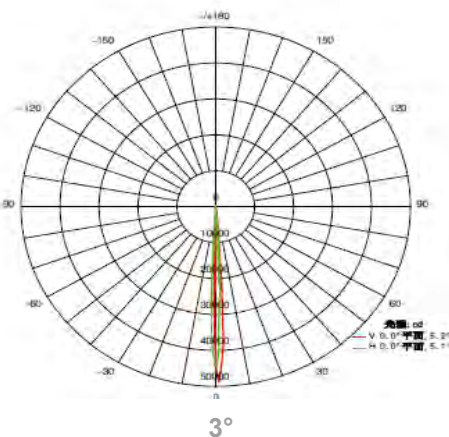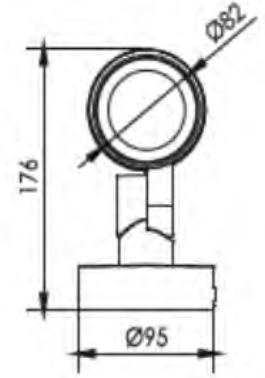

3°

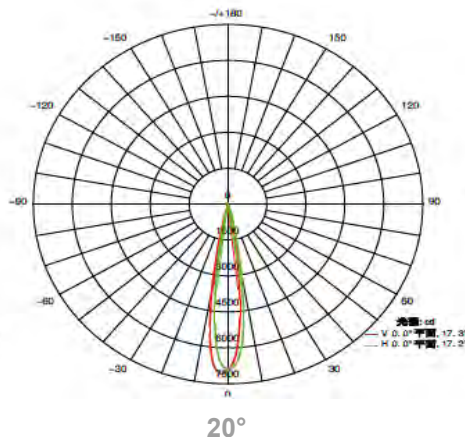

20°

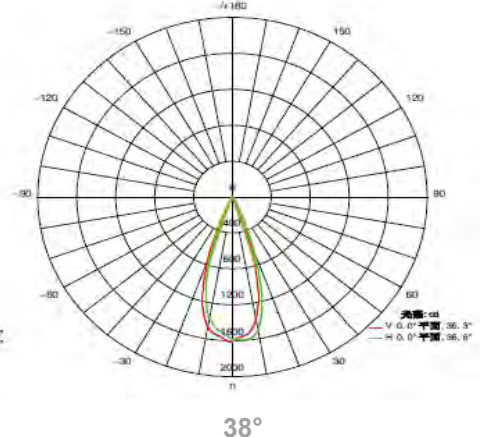

38°

## Product Variants

Product Code	Wattage	CCT	Dimension DxH (MM)
TL-FCSYL02-01	4.5W, 6W	2700K - 6500K, RGBW	35 x 90mm
TL-FCSYL02-02	10W	2700K - 6500K, RGBW	50 x 122mm
TL-FCSYL02-03	10W, 12W	2700K - 6500K, RGBW	82 x 176mm
TL-FCSYL02-04	15W, 20W, 30W	2700K - 6500K, RGBW	108 x 216mm
TL-FCSYL02-05	45W, 50W	2700K - 6500K, RGBW	147 x 256mm
TL-FCSYL02-06	75W, 100W	2700K - 6500K, RGBW	175 x 304mm

