



TL-SPFM7



Recessed Mounted Spot light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Die Cast Aluminium Diffuser: PC

Light Source: Philips, Cree or Equivalent

Driver: Tridonic, Eaglerise or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

IP Rating: IP20

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT

On Request: Other Wattage & Dimension Variants



PHILIPS
TRIDONIC
CREE 






TL-SPFM7-01-7W

TL-SPFM7-01-10W

White
 Black
 Silver

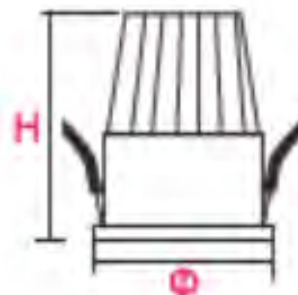


Lumen output (Lm)	Led Power (W)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) ΦxH	CUT OUT (MM)
700LM	7W	180-240V	24/38°	2700-6500K	60X99	Φ55
1000LM	10W	180-240V	24/38°	2700-6500K	68X99	Φ60



TL-SPFM7-02-7W

TL-SPFM7-02-10W

White
 Black
 Silver

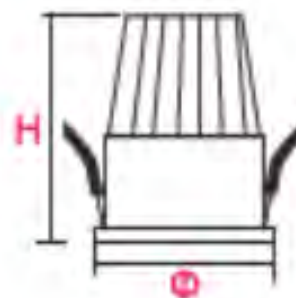

Lumen output (Lm)	Led Power (W)	Voltage (V)	Angle (°)	CCT (K)	SIZE(MM) ΦxH	CUT OUT (MM)
700LM	7W	180-240V	24/38°	2700-6500K	60X60X99mm	Φ60mm
1000LM	10W	180-240V	24/38°	2700-6500K	68X68X99mm	Φ60mm





TL-SPFM7-03-10W

Color: White Black



Lumen (Lm)	LED Power (W)	Voltage (V)	Beam Angle (°)	CCT (K)	Size (MM) $\Phi \times H$	Cut Out (MM)
1200Lm	10W	180-240V	36°	3000-6000K	$\Phi 90 \times H 85$	$\Phi 80$



TL-SPFM7-04-10W

Color: White Black



Lumen (Lm)	LED Power (W)	Voltage (V)	Beam Angle (°)	CCT (K)	Size (MM) $L \times W \times H$	Cut Out (MM)
1200Lm	10W	180-240V	36°	3000-6000K	$\Phi 90 \times H 85$	80x80






TL-SPFM7-05-7W

TL-SPFM7-05-15W

Color: White Black

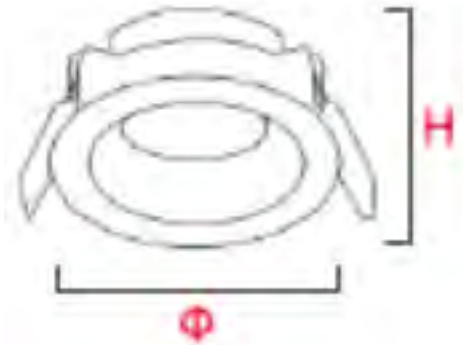


Lumen (Lm)	LED Power (W)	Voltage (V)	Beam Angle (°)	UGR	CCT (K)	Size (mm) Φ × H	Cut Out (mm)
630Lm	7W	180-240V	12/24/36/60°	<19	3000-6000K	Φ85×H38	Φ75
1500Lm	15W	180-240V	12/24/36/60°	<19	3000-6000K	Φ130×H50	Φ100



TL-SPFM7-06-7W

TL-SPFM7-06-12W

White Black Silver

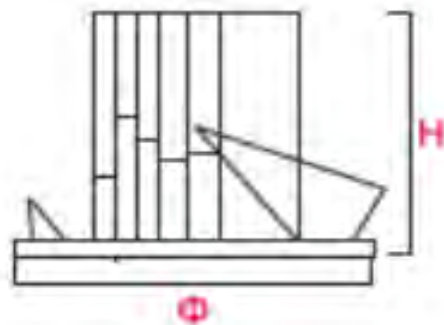


Lumen (Lm)	LED Power (W)	Voltage (V)	Angle (°)	UGR	CCT (K)	Size (MM) Φ × H	Cut Out (MM)
700Lm	7W	180-240V	15°	<19	3000-6000K	Φ49*H52	Φ50
1200Lm	12W	180-240V	15°	<19	3000-6000K	Φ75*H50	Φ65





TL-SPFM7-07- 3W/5W/10W/15W

□ White ■ Black

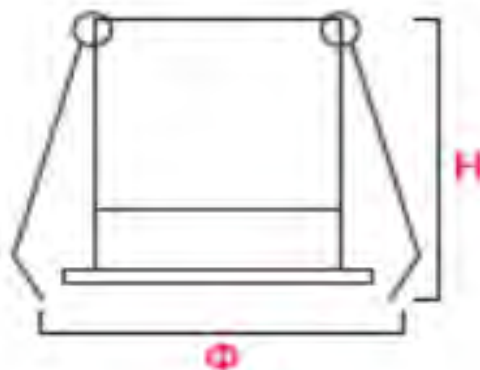

Lumen output (Lm)	Led Power (W)	Voltage (V)	Beam Angle (°)	UGR	CCT (K)	SIZE (MM) Φ × H	CUT OUT (MM)
300Lm	3W	180-240V	24°	<19	3000-6000K	Φ45xH37.5	Φ40
500Lm	5W	180-240V	24°	<19	3000-6000K	Φ60xH51	Φ55
1000Lm	10W	180-240V	24°	<19	3000-6000K	Φ74xH66.5	Φ65
1500Lm	15W	180-240V	24°	<19	3000-6000K	Φ84xH75.5	Φ75



TL-SPFM7-08- 3W/5W/6W/14W

□ White ■ Black



Lumen (Lm)	LED Power (W)	Voltage (V)	Beam Angle (°)	CCT (K)	Size (MM) Φ × H	Cut Out (MM)
240Lm	3W	180-240V	15/24/38°	3000-6000K	Φ40 × H32	35
400Lm	5W	180-240V	15/24/38°	3000-6000K	Φ55 × H43.1	50
600Lm	3x2W	180-240V	15/24/38°	3000-6000K	Φ61 × H55	55
1400Lm	7x2W	180-240V	15/24/38°	3000-6000K	Φ80 × H55	75

