




## TL-FCSYL07



Window Wall Washer light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Aluminium Alloy body

Diffuser: Tempered Glass

Light Source: Cree - 100 lm/W

Input Voltage: DC 12V,24V /AC 100-240V

Driver Protection: Class I

Operating Temperature: - 20°C + 55°C


Body Color: Grey / Customized

On Request: Other Wattage & Dimension Variants



**CREE**   
**LED Chips**




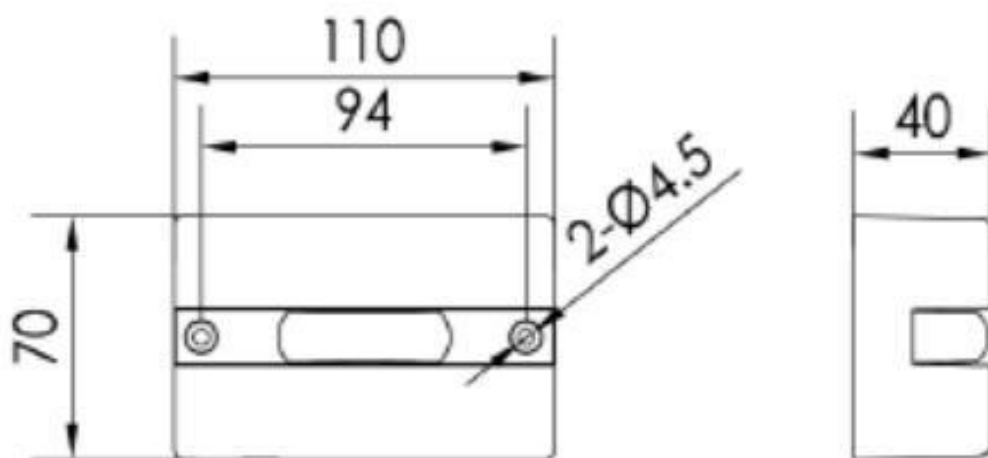

### Product Variants

Product Code	Wattage	Beam Angle	Input Voltage	CCT
TL-FCSYL07-01	3W	2x120°	DC 24V / AC 240V	2700K, 3000K, 4000K, 6000K, RGBW




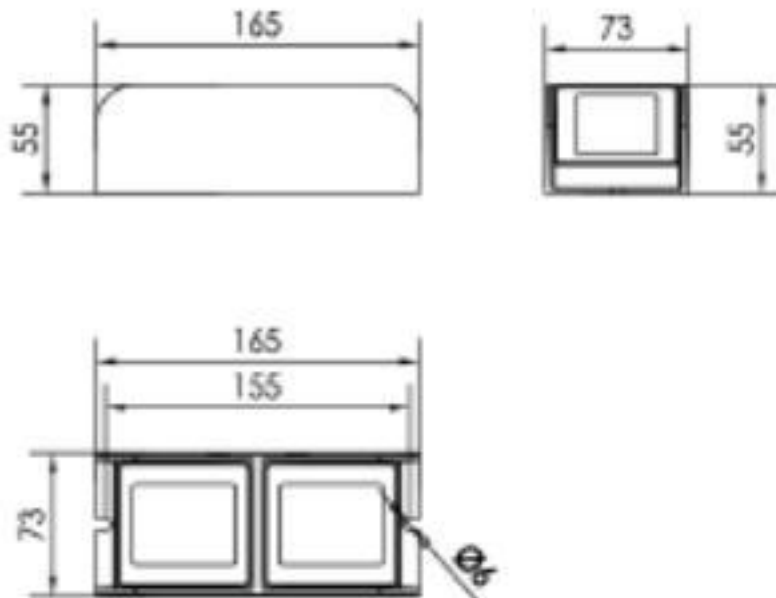

## Product Variants

Product Code	Wattage	Beam Angle	Input Voltage	CCT
TL-FCSYL07-02	20W	8x120°	DC 24V	2700K, 3000K, 4000K, 6000K, RGBW



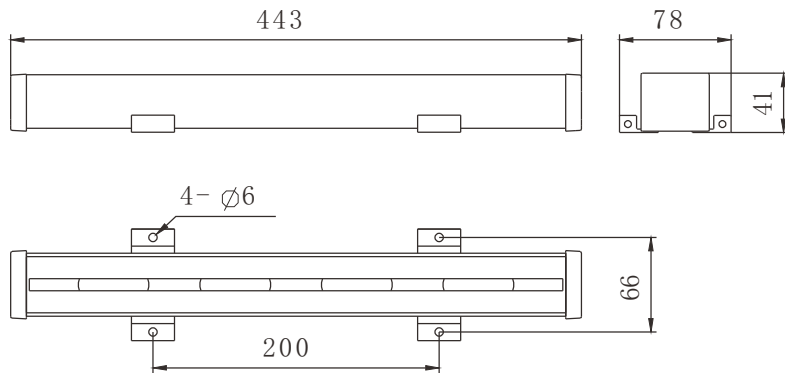

## Product Variants

Product Code	Wattage	Beam Angle	Input Voltage	CCT
TL-FCSYL07-03	20W	5x110°	DC 24V	2700K, 3000K, 4000K, 6000K, RGBW

