


## TL-PLBLSQ



Backlit Panel light ceiling Recessed /Surface/ suspended fixture. Fitting manufactured according to the EN/IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Aluminium Frame & Steel Housing

Diffuser: Acrylic PMMA lens with PS Diffuser

Light Source: Philips, Cree or Equivalent

Driver: Tridonic, Philips or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Beam Angle: 90°

Body Color: RAL 9016 White


Emergency Kit: Tridonic

On Request: Other Wattage & Dimension Variants



**PHILIPS  
TRIDONIC**



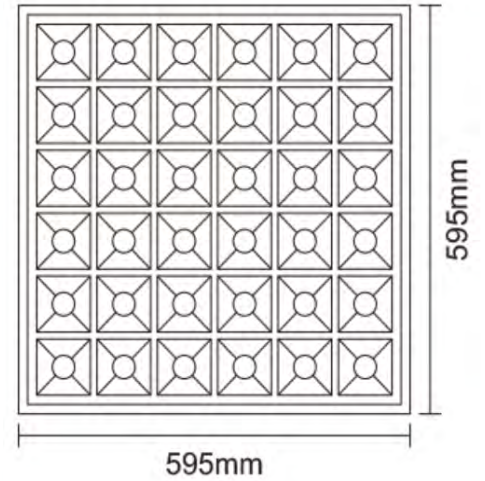

### Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (LxWxH)
TL-PLBLSQ-01-40	40W	4000lm	100 lm/W	3000K - 6500K	595x595x35
TL-PLBLSQ-02-50	50W	5000lm	100 lm/W	3000K - 6500K	595x595x35
TL-PLBLSQ-03-40	40W	4000lm	100 lm/W	3000K - 6500K	1195x295x35
TL-PLBLSQ-04-50	50W	5000lm	100 lm/W	3000K - 6500K	1195x295x35
TL-PLBLSQ-06-60	60W	6000lm	100 lm/W	3000K - 6500K	1195x595x35
TL-PLBLSQ-06-80	80W	8000lm	100 lm/W	3000K - 6500K	1195x595x35

