



TL-LPFK1



Decorative Surface & Suspended Fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Aluminium

Diffuser: Reflector + Diffuser

Light Source: Philips/Osram/cree

Driver: Eaglerise/Philips/Osram

Input Voltage: 220 - 240V

Driver Protection: Class I

Operating Temperature: - 20°C to + 40°C

Body Color: White / Black / Silver

On Request: Other Wattage & Dimension Variants



PHILIPS
TRIDONIC
CREE 

TEMPLUX


Templux Lighting s.r.l, Via Gradenigo 58, PD35100, Italy, info@templuxitaly.com, www.templuxitaly.com



Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (MM)
TL-LPFK1-01-26W	26W	2800lm	15°,24°,38°,50°	2700K - 5700K	L1065 *W35 *H70 MM
TL-LPFK1-01-30W	30W	3300lm	15°,24°,38°,50°	2700K - 5700K	L1200 *W35 *H70 MM
TL-LPFK1-01-30W	30W	3300lm	15°,24°,38°,50°	2700K - 5700K	L1500 *W35 *H70 MM
TL-LPFK1-01-40W	40W	4400lm	15°,24°,38°,50°	2700K - 5700K	L1500 *W35 *H70 MM




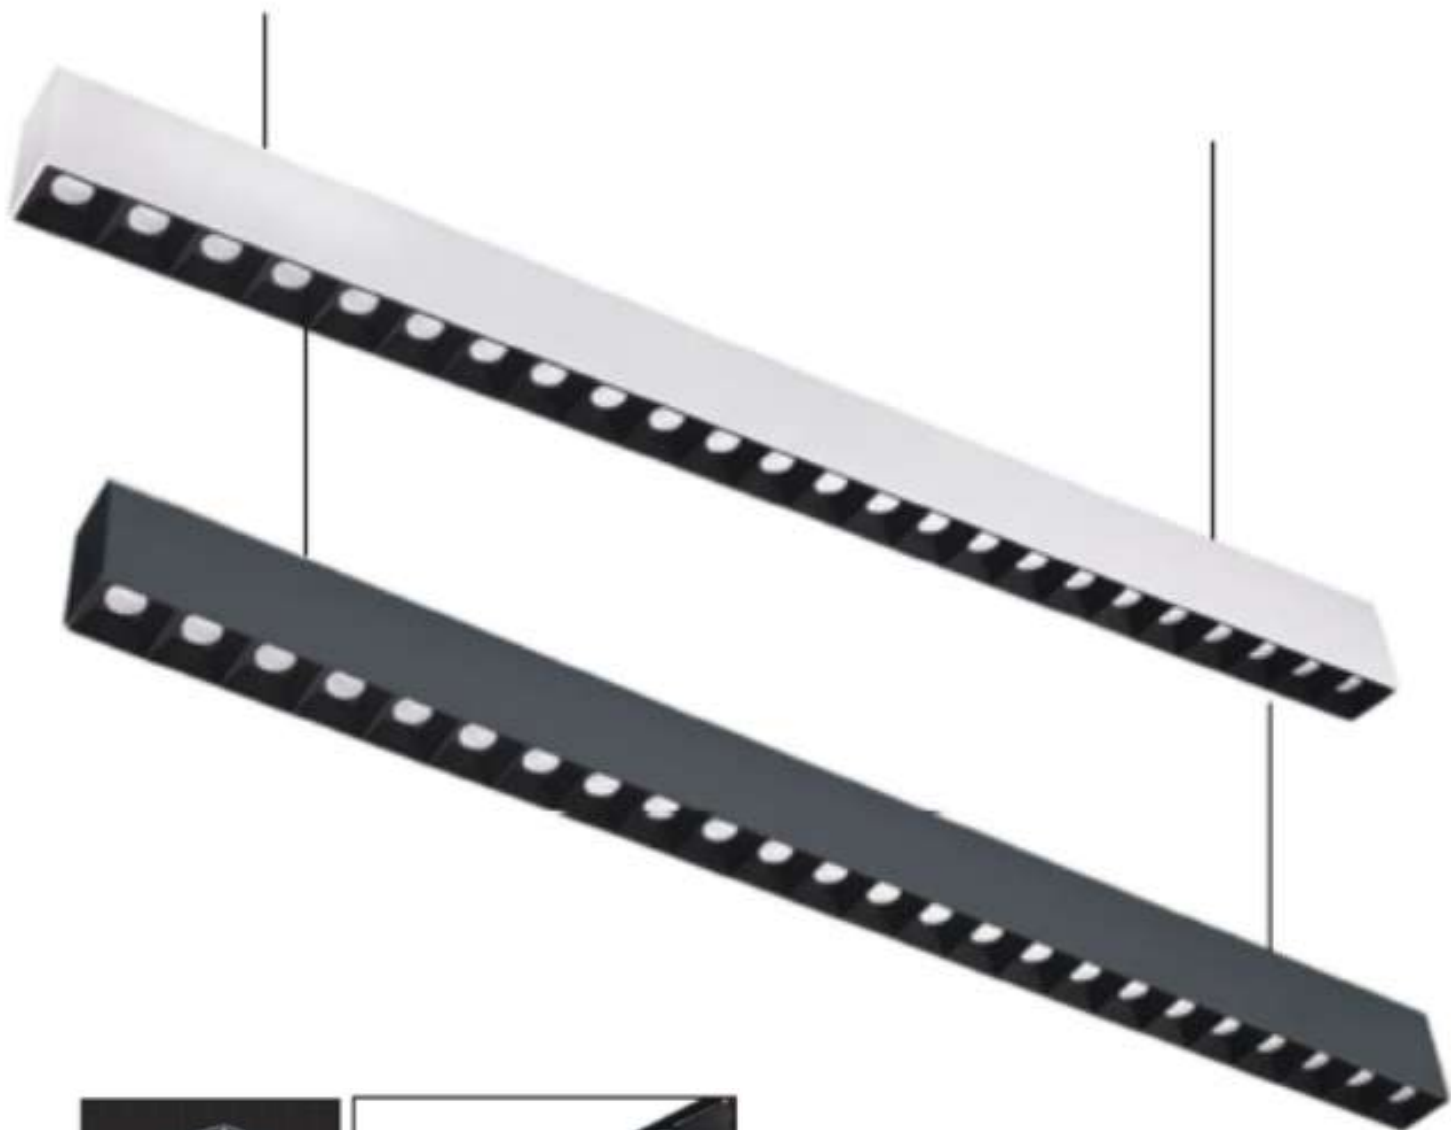

Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (MM)
TL-LPFK1-02-26W	26W	2800lm	15°,24°,38°,50°	2700K - 5700K	L1065 *W35 *H70 MM
TL-LPFK1-02-30W	30W	3300lm	15°,24°,38°,50°	2700K - 5700K	L1200 *W35 *H70 MM
TL-LPFK1-02-30W	30W	3300lm	15°,24°,38°,50°	2700K - 5700K	L1500 *W35 *H70 MM
TL-LPFK1-02-40W	40W	4400lm	15°,24°,38°,50°	2700K - 5700K	L1500 *W35 *H70 MM



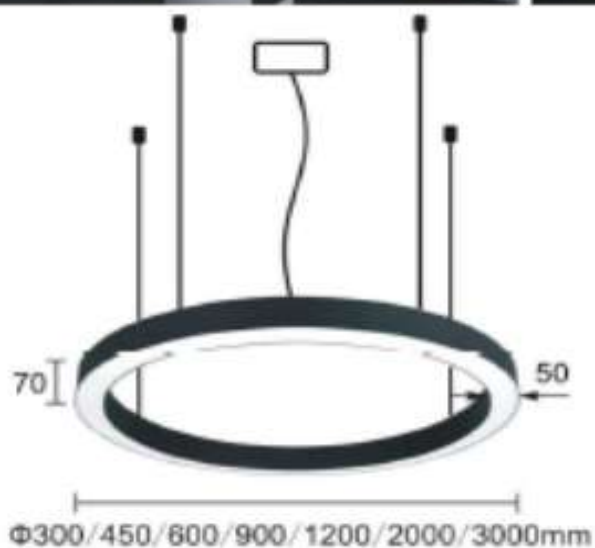

Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (D*H MM)
TL-LPFK1-03-XX-26W	24W	2640lm	110°	2700K - 5700K	300 DIA * 70 H MM
TL-LPFK1-03-XX-30W	30W	3300lm	110°	2700K - 5700K	450 DIA * 70 H MM
TL-LPFK1-03-XX-40W	40W	4400lm	110°	2700K - 5700K	600 DIA * 70 H MM
TL-LPFK1-03-XX-48W	48W	5500lm	110°	2700K - 5700K	900 DIA * 70 H MM
TL-LPFK1-03-XX-56W	56W	6160lm	110°	2700K - 5700K	1200 DIA * 70 H MM
TL-LPFK1-03-XX-144W	144W	15840lm	110°	2700K - 5700K	2000 DIA * 70 H MM
TL-LPFK1-03-XX-194W	194W	21340lm	110°	2700K - 5700K	3000 DIA * 70 H MM





Surface | suspension

dropped opal polycarbonate cover

Finish white 16 black 05 silver 06

Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (MM)
TL-LPFK1-04-14W	14W	1540lm	120°	2700K - 5700K	L600 *W50 *H90 MM
TL-LPFK1-04-20W	20W	2200lm	120°	2700K - 5700K	L900 *W50 *H90 MM
TL-LPFK1-04-30W	30W	3300lm	120°	2700K - 5700K	L1200 *W50 *H90 MM
TL-LPFK1-04-36W	36W	3960lm	120°	2700K - 5700K	L1500 *W50 *H90 MM
TL-LPFK1-04-46W	46W	5060lm	120°	2700K - 5700K	L1800 *W50 *H90 MM
TL-LPFK1-04-56W	56W	6160lm	120°	2700K - 5700K	L2400 *W50 *H90 MM





Surface | suspension double parabolic louver

Finish white 16 black 05 silver 06

Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (MM)
TL-LPFK1-05-14W	14W	1540lm	120°	2700K - 5700K	L600 *W50 *H90 MM
TL-LPFK1-05-20W	20W	2200lm	120°	2700K - 5700K	L900 *W50 *H90 MM
TL-LPFK1-05-30W	30W	3300lm	120°	2700K - 5700K	L1200 *W50 *H90 MM
TL-LPFK1-05-36W	36W	3960lm	120°	2700K - 5700K	L1500 *W50 *H90 MM
TL-LPFK1-05-46W	46W	5060lm	120°	2700K - 5700K	L1800 *W50 *H90 MM
TL-LPFK1-05-56W	56W	6160lm	120°	2700K - 5700K	L2400 *W50 *H90 MM

