



## TL-PNSLY



Suspended decorative light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Anodized Aluminium

Diffuser: Transparent AntiGlare

Light Source: Cree, Samsung

Driver: Philips, Eaglerise or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 5°C + 50°C

Finish: White, Black & Silver Optional


IP Rating: IP20

Optional Dali Dimmable Driver



**PHILIPS**  
**TRIDONIC**  
**CREE** 



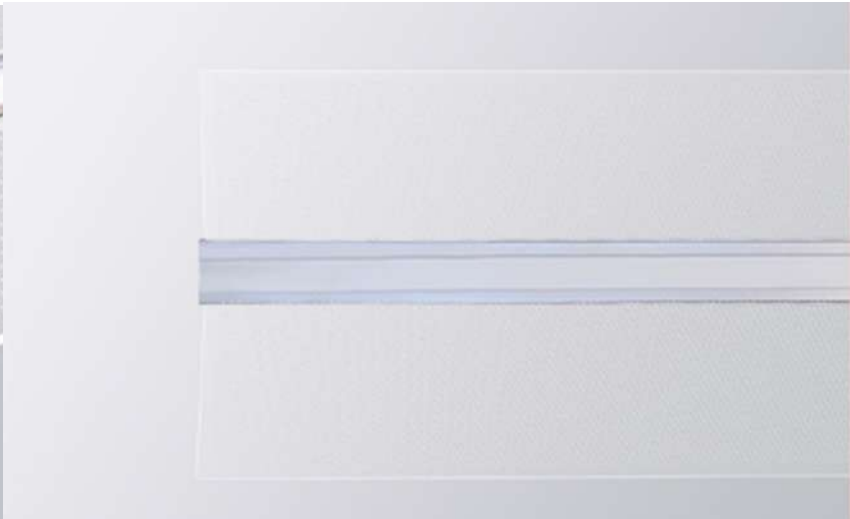

## Product Variants

Product Code	Wattage(W)	Lumen(lm)	Efficiency	CCT	Beam Angle	Size mm
TL-PNSLY-01	30W	4500lm	150 lm/W	3000K - 6000K	Transparent	1250*350*35
TL-PNSLY-02	40W	6000lm	150 lm/W	3000K - 6000K	Transparent	1550*350*35





## Product Variants

Product Code	Wattage(W)	Lumen(lm)	Efficiency	CCT	Beam Angle	Size mm
TL-PNSLY-03	30W	3200lm	106 lm/W	3000K - 6000K	Transparent	1150*152*25
TL-PNSLY-04	40W	4240lm	106 lm/W	3000K - 6000K	Transparent	1450*152*25





## Variety of cover color

cover can be changed individually



### Product Variants

Product Code	Wattage(W)	Lumen(lm)	Efficiency	CCT	Beam Angle	Size (D*H)mm
TL-PNSLY-05	12W	1380lm	115 lm/W	3000K - 6000K	Transparent	290 * H42
TL-PNSLY-06	18W	2070lm	115 lm/W	3000K - 6000K	Transparent	370 * H46
TL-PNSLY-07	24W	2760lm	115 lm/W	3000K - 6000K	Transparent	420 * H46







## Product Variants

Product Code	Wattage(W)	Lumen(lm)	Efficiency	CCT	Beam Angle	Size (D*H)mm
TL-PNSLY-08	12W	1380lm	115 lm/W	3000K - 6000K	Transparent	290 * H42
TL-PNSLY-09	18W	2070lm	115 lm/W	3000K - 6000K	Transparent	370 * H46
TL-PNSLY-10	24W	2760lm	115 lm/W	3000K - 6000K	Transparent	420 * H46





## Product Variants

Product Code	Wattage(W)	Lumen(lm)	Efficiency	CCT	Beam Angle	Size (D*H)mm
TL-PNSLY-11	40W	4000lm	100 lm/W	3000K - 6000K	Transparent	580 * 15
TL-PNSLY-12	60W	6000lm	100 lm/W	3000K - 6000K	Transparent	580 * 15

