



TL-HBKH5



Canopy light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (A - L90B10 @ 100,000 hours) (B - L90B10 @ 50,000 hours)

Body Type: Aluminium

Diffuser: Tempered Glass / PC

Light Source: Cree or Philips

Driver: Meanwell, Inventronics, Philips or Equivalent

Chromaticity tolerance (MacAdam) : 3

Input Voltage: AC 220 - 265V

SPD: 6KV, 10KV, 20KV

Driver Protection: Class I


Operating Temperature: - 20°C + 50°C

Body Color: White

Dimmable: Dali, 1-10V Optional

On Request: Other Wattage & Dimension Variants



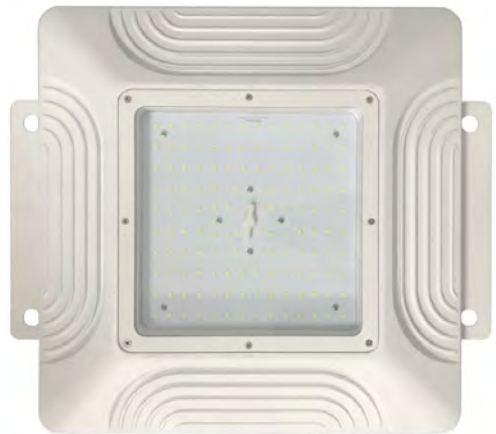

Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (LxWxH mm)
TL-HBKH5-01-60 -A/B	60W	9000 lm	120°	3000K-6500K	280x280x96.5
TL-HBKH5-01-80 -A/B	80W	12000 lm		3000K-6500K	280x280x96.5
TL-HBKH5-01-100 -A/B	100W	15000 lm		3000K-6500K	382x382x129
TL-HBKH5-01-120 -A/B	120W	18000 lm		3000K-6500K	382x382x129
TL-HBKH5-01-160 -A/B	160W	24000 lm		3000K-6500K	382x382x129





TL-HBKH5-02-200 -A/B



TL-HBKH5-02-150 -A/B



TL-HBKH5-02-100 -A/B



TL-HBKH5-02-250 -A/B



Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (LxWxH mm)
TL-HBKH5-02-100 -A/B	100W	15000 lm	60°, 90°, 120° 75°x145°, 55°x155°	3000K-6500K	350x230x75
TL-HBKH5-02-150 -A/B	150W	23250 lm		3000K-6500K	350x310x75
TL-HBKH5-02-200 -A/B	200W	30000 lm		3000K-6500K	350x390x75
TL-HBKH5-02-250 -A/B	250W	37500 lm		3000K-6500K	350x475x75

