




TL-HBLIKH



Industrial & Commercial Highbay fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (A - L90B10 @ 100,000 hours) (B - L90B10 @ 50,000 hours)

Body Type: Die cast aluminium

Diffuser Lens: PC

Light Source: Philips Lumileds 3030,130 lm/W.

Driver: Mean Well or Equivalent

Chromaticity tolerance (MacAdam) : 3

Input Voltage: 100 - 277V

Driver Protection: Class I

Operating Temperature: - 20°C + 55°C

Beam Angle: 45°/90°/120°


Body Color: Black

End Cap Color: Black/Yellow/Red

Dimmable Option: Dali

Request: Other Wattage & Dimension Variants



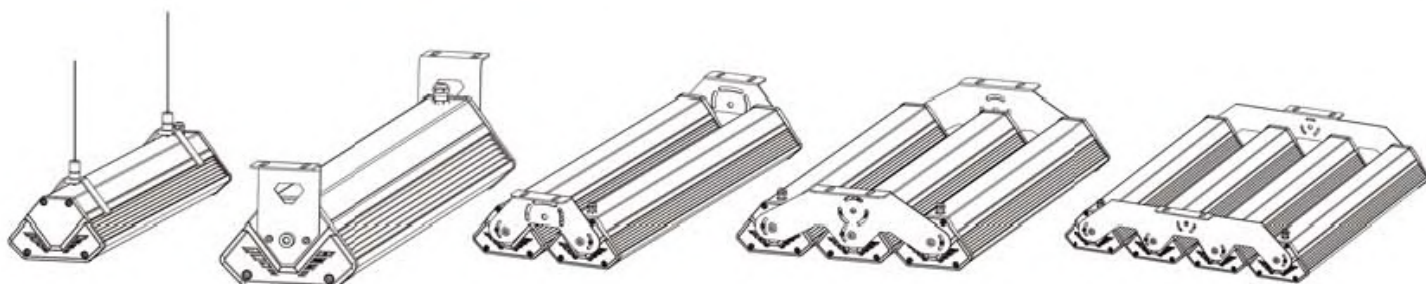

Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (MM)
TL-HBLIKH-50-A/B	50W	6500 lm	130lm/W	3000K/6500K	285x135x90MM
TL-HBLIKH-100-A/B	100W	13000 lm	130lm/W	3000K/6500K	535x135x90MM
TL-HBLIKH-150-A/B	150W	19500 lm	130lm/W	3000K/6500K	795x135x90MM
TL-HBLIKH-175-A/B	175W	22750 lm	130lm/W	3000K/6500K	795x135x90MM
TL-HBLIKH-200-A/B	200W	26000 lm	130lm/W	3000K/6500K	1060x135x90MM
TL-HBLIKH-225-A/B	225W	29250 lm	130lm/W	3000K/6500K	1060x135x90MM

- Acc: 401 - Two Module Mounting Bracket
- Acc: 402 - Three Module Mounting Bracket
- Acc: 403 - Four Module Mounting Bracket
- Acc: 404 - Emergency Kit
- Acc: 405 - Suspension Kit in Customized length

