



# TL-PLBLR1



Backlit Panel light ceiling Recessed /Surface/ suspended fixture. Fitting manufactured according to the EN/IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Steel Sheet

Diffuser: Prismatic / Opal Diffuser

Light Source: Osram, Philips or Equivalent

Driver: Tridonic, Lifud or Equivalent

Chromaticity tolerance (MacAdam) : 3

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Beam Angle: 110°

Body Color: White




IP Rating: IP40, IP44, IP54, IP65

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali & IGBT

On Request: Other Wattage & Dimension Variants



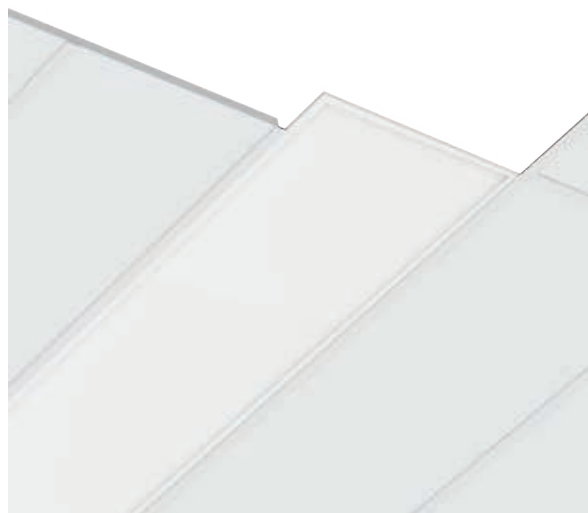

## Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (LxWxH)
TL-PLBLR1-35-60601	35W	4000lm	115 lm/W	3000K/6500K	595x595x33
TL-PLBLR1-40-60602	40W	4000lm	100 lm/W	3000K/6500K	595x595x33
TL-PLBLR1-60-60603	60W	6000lm	100 lm/W	3000K/6500K	595x595x33
TL-PLBLR1-40-12301	40W	3400lm	85 lm/W	3000K/6500K	1159x295x32
TL-PLBLR1-48-12302	48W	4800lm	100 lm/W	3000K/6500K	1159x295x32
TL-PLBLR1-60-12303	60W	6000lm	100 lm/W	3000K/6500K	1159x295x32

