



TL-PLBLKH



Backlit Panel light ceiling Recessed /Surface/ suspended fixture. Fitting manufactured according to the EN/IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: Aluminium

Diffuser: Louvers/ Opal Diffuser

Light Source: Osram, Philips or Equivalent

Driver: Tridonic, Lifud or Equivalent

Chromaticity tolerance (MacAdam) : 3

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Body Color: White/Black

IP Rating: IP40


Emergency Kit: Tridonic

Dimmable: 1-10V, Dali & IGBT

On Request: Other Wattage & Dimension Variants



TL-PLBLKH-01-40/48

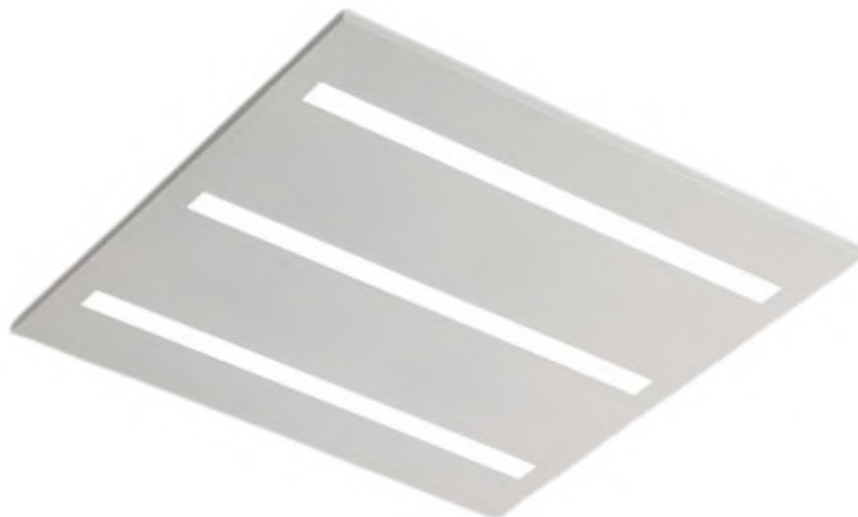

TL-PLBLKH-02-40/48



TL-PLBLKH-03-40/48

Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (LxWxH)
TL-PLBLKH-01-40	40W	4800lm	120°	3000K/6500K	595x595x25
TL-PLBLKH-01-48	48W	5760lm	120°	3000K/6500K	595x595x25
TL-PLBLKH-02-40	40W	4800lm	24°,36°	3000K/6500K	595x595x25
TL-PLBLKH-02-48	48W	5760lm	24°,36°	3000K/6500K	595x595x25
TL-PLBLKH-03-40	40W	4800lm	36°+120°	3000K/6500K	595x595x25
TL-PLBLKH-03-48	48W	5760lm	36°+120°	3000K/6500K	595x595x25

