



## TL-PTKH2



Garden light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life A - (L90B10 @ 50,000 hours) B- (L90B10 @ 100,000 hours)

Body Type: Die cast aluminium

Diffuser: Tempered Glass

Light Source: Philips Lumileds 3030,130 lm/W.

Driver: Mean Well, Inventronics or Equivalent

Chromaticity tolerance (MacAdam) : 3

Input Voltage: 100 - 265V

Driver Protection: Class I

SPD: 6KV


Operating Temperature: - 20°C + 55°C

Body Color: Graphite , Other colors on Request

Dimmable: 1-10V & Dali

On Request: Other Wattage & Dimension Variants



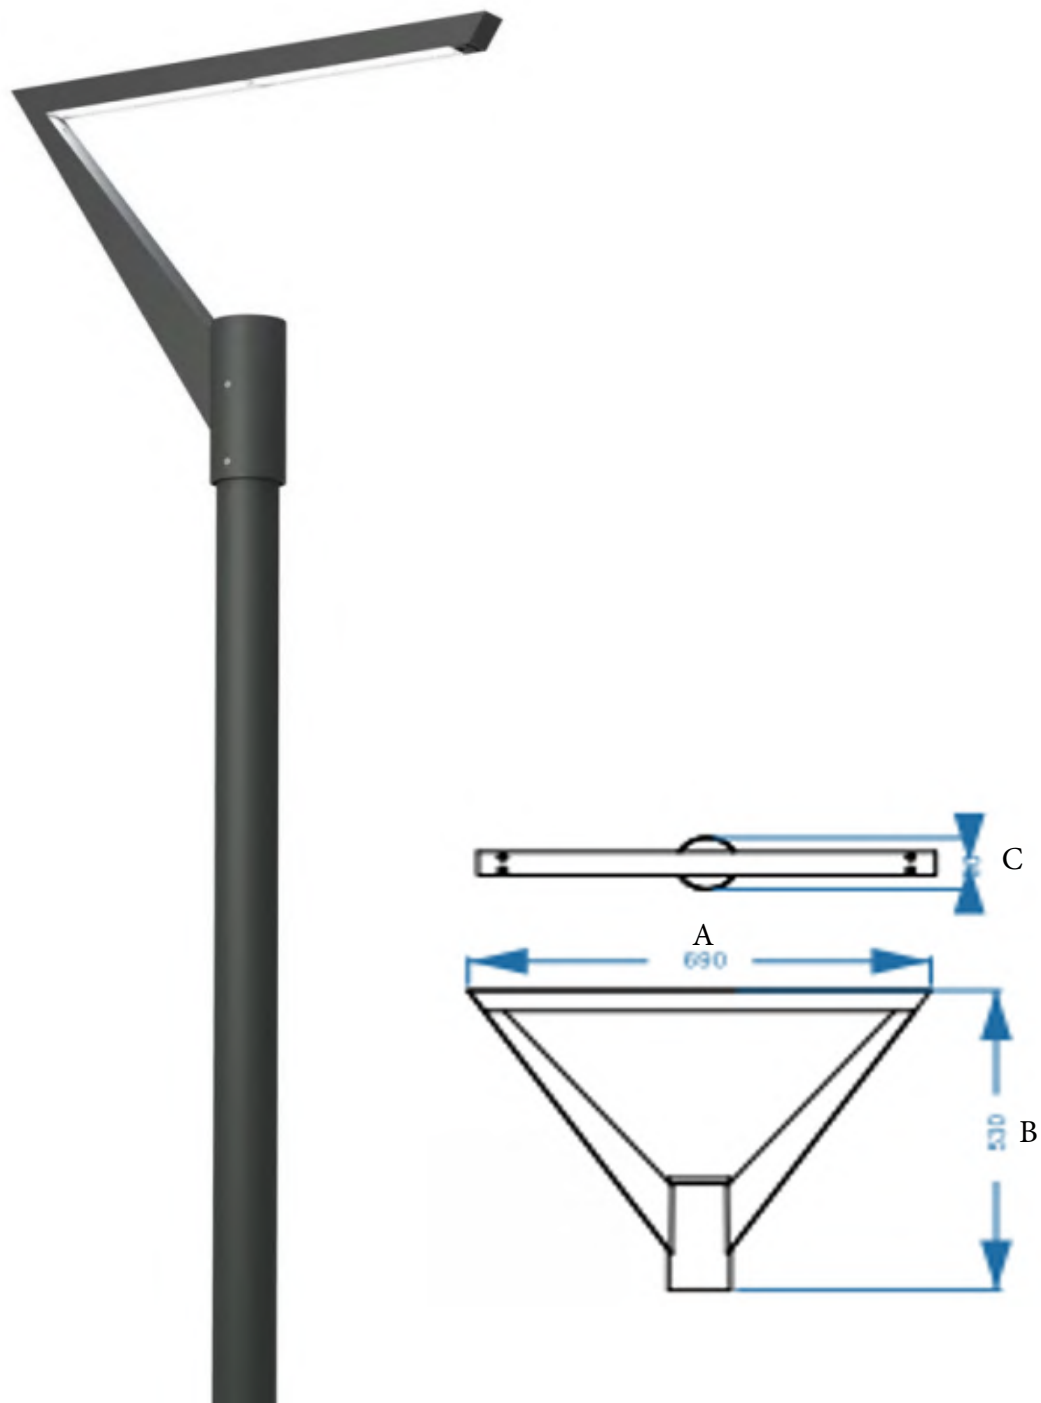

### Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (A*B*C)
TL-PTKH2-01-50- A/B	50W	6500 lm	60°, 120°	2700K - 6500K	690X530X90 MM
TL-PTKH2-01-60-A/B	60W	7800 lm	60°, 120°	2700K - 6500K	690X530X90 MM
TL-PTKH2-01-70-A/B	70W	9100 lm	60°, 120°	2700K - 6500K	690X530X90 MM





### Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (A*B*C)
TL-PTKH2-02-50- A/B	50W	6500 lm	60°, 120°	2700K - 6500K	690X530X90 MM
TL-PTKH2-02-60-A/B	60W	7800 lm	60°, 120°	2700K - 6500K	690X530X90 MM
TL-PTKH2-02-70-A/B	70W	9100 lm	60°, 120°	2700K - 6500K	690X530X90 MM





## Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (A*B*C)
TL-PTKH2-03-50- A/B	50W	6500 lm	60°, 120°	2700K - 6500K	1950X530X90 MM
TL-PTKH2-03-60-A/B	60W	7800 lm	60°, 120°	2700K - 6500K	1950X530X90 MM
TL-PTKH2-03-60*2-A/B	120W	15600 lm	60°, 120°	2700K - 6500K	1950X530X90 MM

