



## TL-DLHNG-02



Recessed Mounted downlight light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B20 @ 50,000 hours)

Body Type: Die Cast Aluminium

Light Source: COB Cree or Bridgelux

Driver: Tridonic

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 40°C

Beam Angle: 24°, 36°, 60°

Frame Color: White

IP Rating: IP20

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT



On Request: Other Wattage & Dimension Variants



**TRIDONIC** 



Templux Lighting s.r.l, Via Gradenigo 58, PD35100, Italy, [info@templuxitaly.com](mailto:info@templuxitaly.com), [www.templuxitaly.com](http://www.templuxitaly.com)

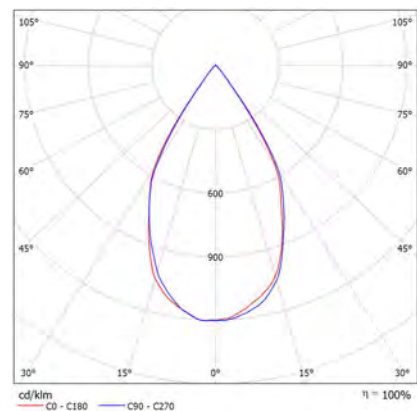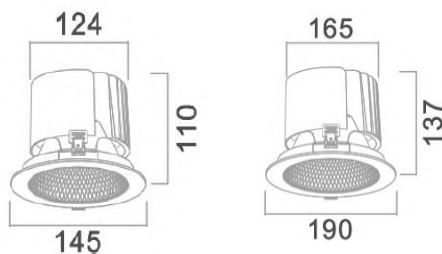

### Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Size /Cutout (mm)
TL-DLHNG-02-20W	20W	2400lm	24°, 36°, 60°	3000K - 6000K	Φ145*110H / 125
TL-DLHNG-02-30W	30W	3600lm	24°, 36°, 60°	3000K - 6000K	Φ145*110H / 125
TL-DLHNG-02-45W	45W	5400lm	24°, 36°, 60°	3000K - 6000K	Φ190*137H / 170

