



# TL-DLKH1A



Recessed Mounted downlight light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: High Purity Aluminium

Light Source: COB

Driver: Lifud, Eaglerise, Tridonic or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 40°C

Beam Angle: 1A - 24°, 38°, 55°  
1B - 15°, 24°, 38°

Frame Color: White, Black


Reflector Color: White, Black, Silver, Matt Silver

IP Rating: IP40

Chromaticity tolerance (MacAdam) : 3

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT

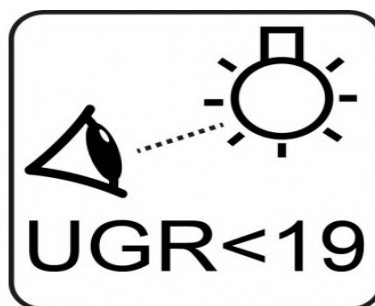



### Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Size /Cutout (mm)
TL-DLKH1A-01-10W	10W	1000lm	100 lm/W	3000K/6000K	Φ86*55 / 75
TL-DLKH1A-02-20W	20W	2000lm	100 lm/W	3000K/6000K	Φ101*60 / 90
TL-DLKH1A-03-30W	30W	3000lm	100 lm/W	3000K/6000K	Φ140*73 / 125
TL-DLKH1A-04-40W	40W	4000lm	100 lm/W	3000K/6000K	Φ180*94 / 165
TL-DLKH1A-05-50W	50W	5000lm	100 lm/W	3000K/6000K	Φ214*110 / 200





### Product Variants - Adjustable Type

Product Code	Wattage	Lumen	Efficiency	CCT	Size /Cutout (mm)
TL-DLKH1B-01-10W	10W	1000lm	100 lm/W	2700K - 6500K	Φ85*80 / 75
TL-DLKH1B-02-20W	20W	2000lm	100 lm/W	2700K - 6500K	Φ104*108 / 95
TL-DLKH1B-03-30W	30W	3000lm	100 lm/W	2700K - 6500K	Φ132*127 / 125

