




## TL-DLKH5



Recessed Mounted downlight light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body Type: High Purity Aluminium

Light Source: COB

Driver: Lifud, Eaglerise, Tridonic or Equivalent

Chromaticity tolerance (MacAdam) : 3

Input Voltage: 220-265V AC 50/60HZ

Driver Protection: Class I

Beam Angle: 60°, 90°

Frame Color: White, Black


Reflector Color: White

IP Rating: IP40

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT

On Request: Other Wattage & Dimension Variants

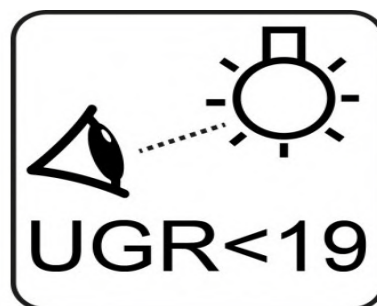



## Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Size /Cutout (mm)
TL-DLKH5-7W	7W	700lm	100 lm/W	2700K - 6500K	Φ90*45H / 70mm
TL-DLKH5-10W	10W	1000lm	100 lm/W	2700K - 6500K	Φ110*65H / 95mm
TL-DLKH5-15W	15W	1500lm	100 lm/W	2700K - 6500K	Φ130*68H / 105mm
TL-DLKH5-20W	20W	2000lm	100 lm/W	2700K - 6500K	Φ165*90H / 140mm
TL-DLKH5-30W	30W	3000lm	100 lm/W	2700K - 6500K	Φ190*95H / 165mm
TL-DLKH5-40W	40W	4000lm	100 lm/W	2700K - 6500K	Φ225*105H / 200mm

