



TL-FLKH2



Flood light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (A - L90B10 @ 100,000 hours) (B - L90B10 @ 50,000 hours)

Body Type: Aluminium

Diffuser: Tempered Glass

Light Source: Cree or Philips

Driver: Meanwell, Inventronics, Philips or Equivalent

Chromaticity tolerance (MacAdam) : 3

Input Voltage: AC 220 - 265V

SPD: 6KV, 10KV, 20KV

Driver Protection: Class I

Operating Temperature: - 20°C + 60°C


Beam Angle: 30°,60°,90°,T2,T3,T4,T5

Body Color: Black / Grey

Dimmable: Dali, 1-10V Optional

On Request: Other Wattage & Dimension Variants



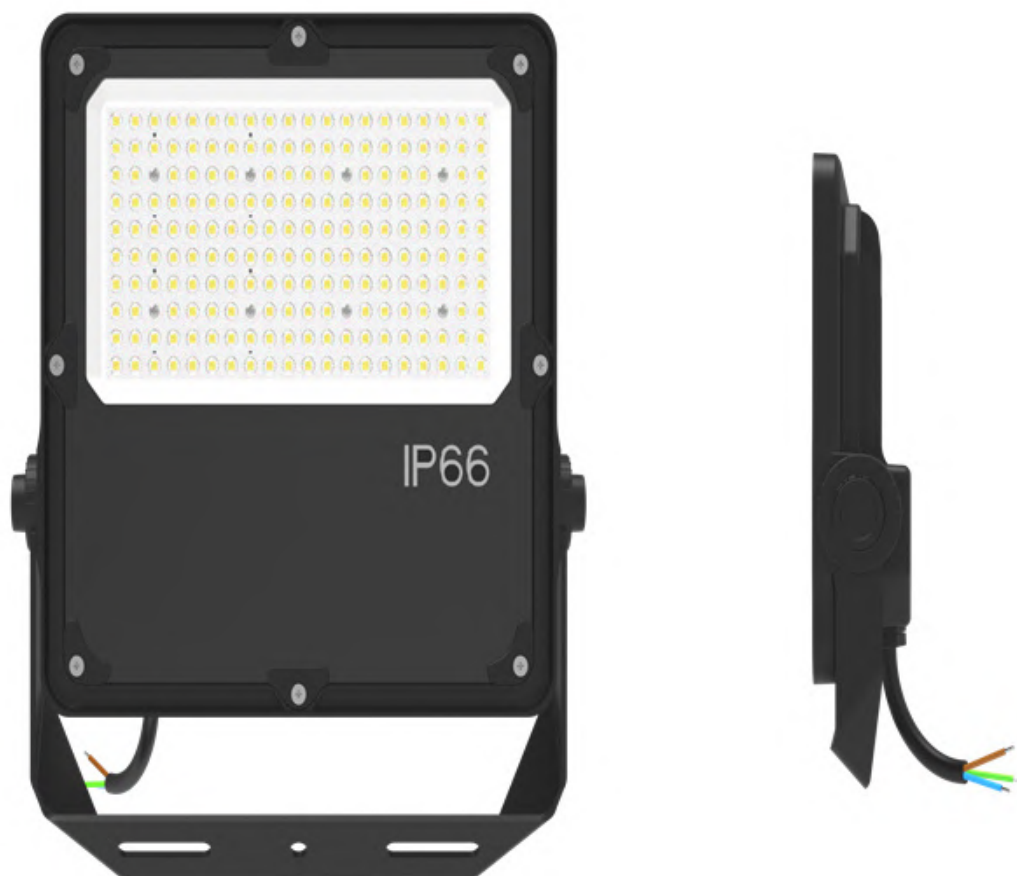

Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (mm)
TL-FLKH2-50 - A/B	50W	7000 lm	150 lm/W	3000K-6500K	290x230x48
TL-FLKH2-80 -A/B	80W	12000 lm	150 lm/W	3000K-6500K	310x300x53
TL-FLKH2-100 -A/B	100W	15000 lm	150 lm/W	3000K-6500K	310x300x53
TL-FLKH2-150 -A/B	150W	22500 lm	150 lm/W	3000K-6500K	360x300x53
TL-FLKH2-200 -A/B	200W	30000 lm	150 lm/W	3000K-6500K	370x350x53
TL-FLKH2-300 -A/B	300W	45000 lm	150 lm/W	3000K-6500K	430x400x58

