



TL-SPFM2



Recessed Mounted Adjustable Spot light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B20 @ 50,000 hours)

Body Type: Die Cast Aluminium

Optic: High efficiency Reflector

Light Source: Philips, Cree or Equivalent

Driver: Tridonic, Eaglerise or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Fixture Adjustable Angle: 30°

Beam Angle: 15°, 24°, 36°, 50° & other angles on Request.

Body Color: White / Black / Grey

IP Rating: IP20

Emergency Kit: Tridonic


Dimmable: 1-10V, Dali, IGBT

On Request: Other Wattage & Dimension Variants



PHILIPS
TRIDONIC
CREE 



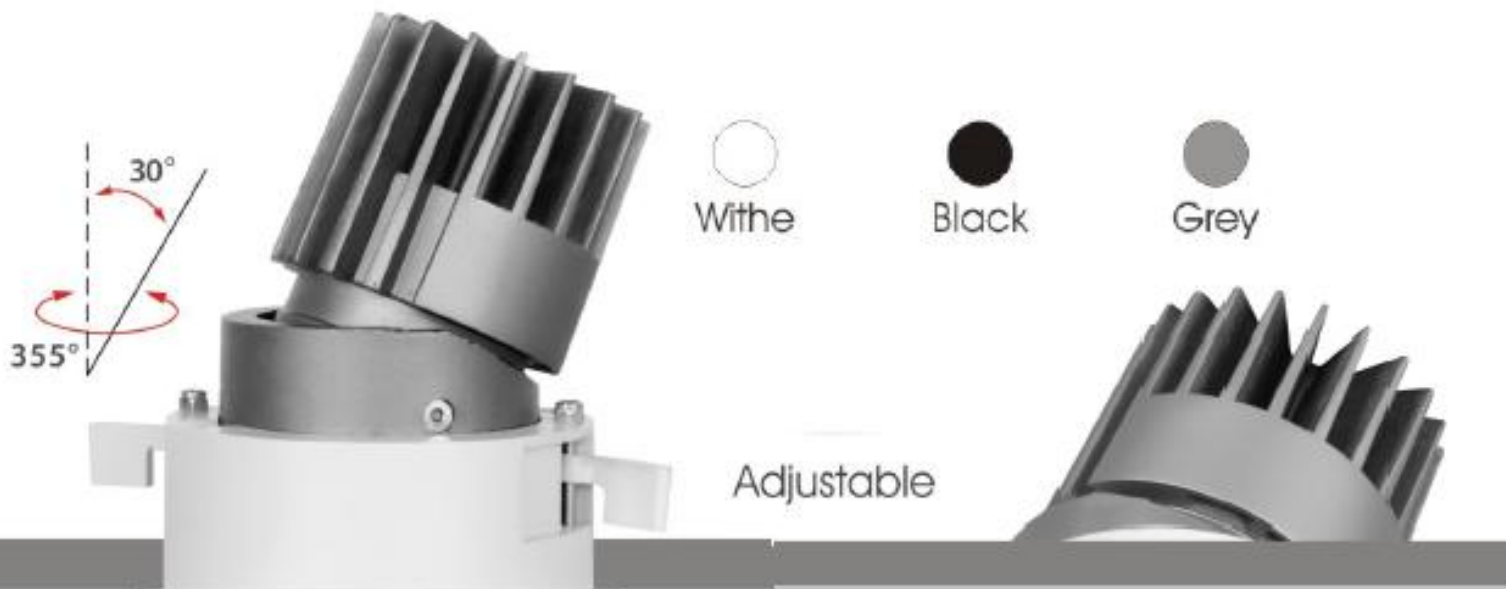

Secondary:



Specular



Matt



White



Black



Gold

Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Beam Angle	Dimension (ØxH) / Cut Out
TL-SPFM2-5W	5W	450lm	90lm/W	2700K - 6000K	15°, 24°, 36°, 50°	Ø50xH60 / Ø40 mm
TL-SPFM2-7W	7W	630lm	90lm/W	2700K - 6000K	15°, 24°, 36°, 50°	Ø65xH84 / Ø60 mm
TL-SPFM2-10W	10W	900lm	90lm/W	2700K - 6000K	15°, 24°, 36°, 50°	Ø85xH100 / Ø75 mm
TL-SPFM2-12W	12W	1080lm	90lm/W	2700K - 6000K	15°, 24°, 36°, 50°	Ø85xH100 / Ø75 mm
TL-SPFM2-15W	15W	1350lm	90lm/W	2700K - 6000K	15°, 24°, 36°, 50°	Ø115xH130 / Ø105 mm
TL-SPFM2-18W	18W	1620lm	90lm/W	2700K - 6000K	15°, 24°, 36°, 50°	Ø115xH130 / Ø105 mm
TL-SPFM2-24W	24W	2160lm	90lm/W	2700K - 6000K	15°, 24°, 36°, 50°	Ø115xH130 / Ø105 mm
TL-SPFM2-35W	35W	3150lm	90lm/W	2700K - 6000K	15°, 24°, 36°, 50°	Ø142xH175 / Ø125 mm

