



TL-SPFM4



Recessed Mounted Spot light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80B10 @ 50,000 hours)

Body Type: Die Cast Aluminium

Diffuser: Clear Glass

Light Source: Philips, Cree or Equivalent

Driver: Tridonic, Eaglerise or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Beam Angle: 60° other angles on Request.

Body Color: White / Black

IP Rating: IP44

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT

On Request: Other Wattage & Dimension Variants




PHILIPS
TRIDONIC
CREE 





CITIZEN 20W 3000K 60°

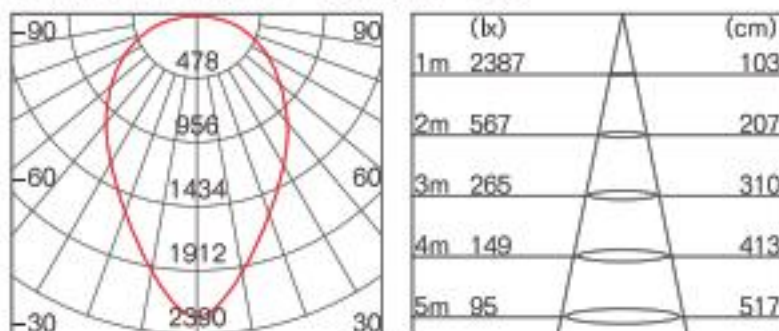

Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Beam Angle	Dimension (ØxH) / Cut Out
TL-SPFM4-6W	6W	600lm	100lm/W	2700K - 6000K	60°	Ø90xH47 / Ø 75 mm
TL-SPFM4-12W	12W	1200lm	100lm/W	2700K - 6000K	60°	Ø110xH60 / Ø 95 mm
TL-SPFM4-20W	20W	2000lm	100lm/W	2700K - 6000K	60°	Ø130xH70 / Ø 110 mm
TL-SPFM4-30W	30W	3000lm	100lm/W	2700K - 6000K	60°	Ø160xH80 / Ø 135 mm

