



# TL-SPKH1



Recessed Mounted Spot light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90 B10 @ 50,000 hours)

Body Type: Aluminium Die Cast

Diffuser: PC

Light Source: Cree COB or Equivalent

Driver: Tridonic, Lifud, Eaglerise or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Frame Color: White or Black

IP Rating: IP40

Chromaticity tolerance (MacAdam) : 3

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT

On Request: Other Wattage & Dimension Variants





TL-SPKH1A-01-2W



TL-SPKH1A-01-4W



TL-SPKH1A-01-10W




TL-SPKH1A-01-20W




### Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension /Cutout (mm)
TL-SPKH1A-01-2W	2W	200lm	15°30°45°	2700K-6500K	45x43x45mm / 35*35 mm
TL-SPKH1A-01-4W	4W	400lm	15°30°45°	2700K-6500K	75x43x45mm / 65*35 mm
TL-SPKH1A-01-10W	10W	1000lm	15°30°45°	2700K-6500K	150x50x45mm / 140*38 mm
TL-SPKH1A-01-20W	20W	2000lm	15°30°45°	2700K-6500K	280x50x45mm / 275*38 mm
TL-SPKH1A-01-30W	30W	3000lm	15°30°45°	2700K-6500K	415x50x45mm / 405*38 mm

3W 15°



3W 38/45°





### Product Variants -Adjustable

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension /Cutout (mm)
TL-SPKH1B-02-2W	2W	200lm	15°30°45°	2700K-6500K	45x43x45mm / 35*35 mm
TL-SPKH1B-02-4W	4W	400lm	15°30°45°	2700K-6500K	75x43x45mm / 65*35 mm
TL-SPKH1B-02-10W	10W	1000lm	15°30°45°	2700K-6500K	150x50x45mm / 140*38 mm
TL-SPKH1B-02-20W	20W	2000lm	15°30°45°	2700K-6500K	280x50x45mm / 275*38 mm
TL-SPKH1B-02-30W	30W	3000lm	15°30°45°	2700K-6500K	415x50x45mm / 405*38 mm






### Product Variants - Trimless

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension /Cutout (mm)
TL-SPKH1C-03-10W	10W	1000lm	15°30°45°	2700K-6500K	150x50x45mm / 140*38 mm
TL-SPKH1C-03-20W	20W	2000lm	15°30°45°	2700K-6500K	280x50x45mm / 275*38 mm
TL-SPKH1C-03-30W	30W	3000lm	15°30°45°	2700K-6500K	415x50x45mm / 405*38 mm





**WALL  
WASHER**

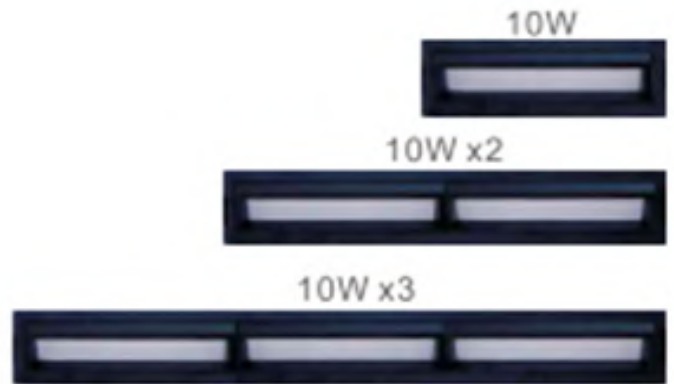

**Product Variants - Fixed Wallwasher**

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension /Cutout (mm)
TL-SPKH1D-04-10W	10W	1000lm	Assymetric 45°	2700K-6500K	150x50x45mm / 140*38 mm
TL-SPKH1D-04-20W	20W	2000lm	Assymetric 45°	2700K-6500K	280x50x45mm / 275*38 mm
TL-SPKH1D-04-30W	30W	3000lm	Assymetric 45°	2700K-6500K	415x50x45mm / 405*38 mm

