



TL-SPVNA1



Recessed Mounted Spot light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L70 @ 60,000 hours)

Body Type: Aluminium Die Cast

Reflector Finish: Dark light (RD), Champaign Gold (RG), Mirror (RM)

Light Source: Cree or Philips COB

Driver: Philips/Tridonic

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Beam Angle: 24°, 36°

Frame Color: White/ Black/ Silver

IP Rating: IP44

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT

On Request: Other Wattage & Dimension Variants




PHILIPS
TRIDONIC
CREE






Mounting frame color: White Silver Black

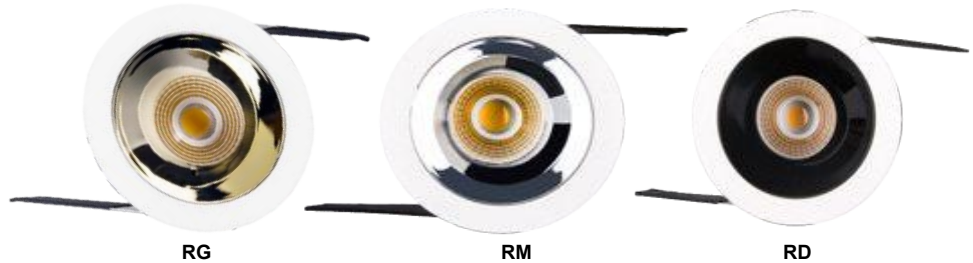


Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Size /Cutout (mm)
TL-SPVNA01-6	6W	600lm	100 lm/W	2700K/6500K	Φ90*78mm / 83mm
TL-SPVNA01-10	10W	1000lm	100 lm/W	2700K/6500K	Φ90*78mm / 83mm
TL-SPVNA01-15	15W	1500lm	100 lm/W	2700K/6500K	Φ90*98mm / 83mm
TL-SPVNA01-6 Asymmetric	6W	600lm	100 lm/W	2700K/6500K	Φ90*78mm / 83mm
TL-SPVNA01-10 Asymmetric	10W	1000lm	100 lm/W	2700K/6500K	Φ90*78mm / 83mm
TL-SPVNA01-15 Asymmetric	15W	1500lm	100 lm/W	2700K/6500K	Φ90*98mm / 83mm



h(m)	D(m)	Em(lx)	E _{max} (lx)
1	0.4	848	24° 3391
2	0.8	295	843
3	1.2	169	375
4	1.6	116	211
5	1.9	88	135



h(m)	D(m)	Em(lx)	E _{max} (lx)
1	0.5	623	36° 2492
2	1.1	220	628
3	1.6	126	279
4	2.1	86	157
5	2.7	86	101

