



## TL-SPVNTL01



Recessed Mounted Trimless Spot light fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L80 B20 @ 50,000 hours)

Body Type: Aluminium Die Cast

Light Source: Cree COB or Equivalent

Driver: Tridonic, Philips or Equivalent

Input Voltage: 220-240VAC 50/60HZ

Driver Protection: Class I

Operating Temperature: - 10°C + 45°C

Reflector color: Gold, Mirror, White or Black

IP Rating: IP44

Emergency Kit: Tridonic

Dimmable: 1-10V, Dali, IGBT

On Request: Other Wattage & Dimension Variants




**PHILIPS**  
**TRIDONIC**  
**CREE** 








Install the mounting frame to the ceiling  
Install power lines  
Embed the lamp in the component.



## Product Variants

Product Code	Wattage	Lumen	Beam Angle	CCT	Dimension (DxH) / Cut out (mm)
TL-SPVNTL01-6W	6W	460lm	24°, 36°, 60°	2700K-4000K	Ø78.5xH72 / Ø83mm
TL-SPVNTL01-10W	10W	800lm	24°, 36°, 60°	2700K-4000K	Ø78.5xH72 / Ø83mm
TL-SPVNTL01-15W	15W	1000lm	15°, 24°, 36°, 60°	2700K-4000K	Ø78.5xH92 / Ø83mm
TL-SPVNTL01-20W	20W	1450lm	15°, 24°, 36°	2700K-4000K	Ø90xH100 / Ø92mm
TL-SPVNTL01-25W	25W	2390lm	15°, 24°, 45°	2700K-4000K	Ø112xH145 / Ø114mm

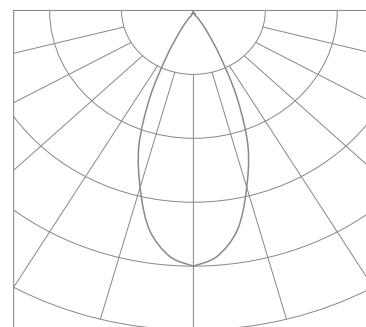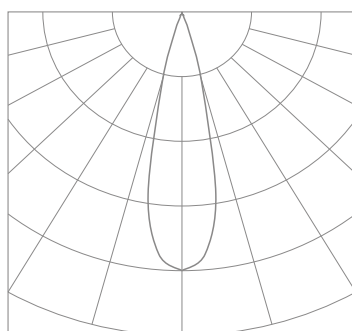

h(m)	D(m)	Em(lx)	Emax(lx)
			15°
1	0.3	4663	18285
2	0.6	1632	4571
3	0.9	932	2032
4	1.2	641	1143

h(m)	D(m)	Em(lx)	Emax(lx)
			24°
1	0.5	2158	10070
2	0.9	755	2518
3	1.4	432	1119
4	1.9	297	629

h(m)	D(m)	Em(lx)	Emax(lx)
			45°
1	0.8	1063	3707
2	1.6	372	927
3	2.4	212	412
4	3.2	146	232

