



## TL-WPCO



Weatherproof Ceiling or wall or Suspended fixture. Fitting manufactured according to the EN / IEC 60598-1:2015 rules.

Longer life (L90B10 @ 50,000 hours)

Body / Diffuser : PC /Glass

Light Source: Bridgelux or Philips or Tridonic

Driver: Tridonic

Input Voltage: 200- 240V, 50-60 HZ

Driver Protection: Class I

Operating Temperature: - 20°C + 55°C

Beam Angle: 60°.

Body Color Standard: White or Black


Dimmable: 1-10V & Dali

Sensor: Microwave Sensor





**TEMPLUX**

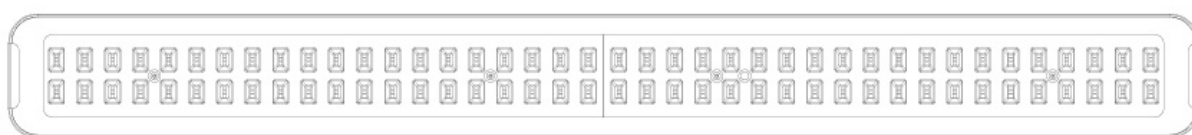

## Product Variants

Product Code	Wattage	Lumen	Efficiency	CCT	Dimension (AXBXC)
TL-WPCO-01-20	20W	2000 lm	100lm/W	3000K/6000K	606X120X53MM
TL-WPCO-01-40	40W	4000 lm	100lm/W	3000K/6000K	606X120X53MM
TL-WPCO-02-60	60W	6000 lm	100lm/W	3000K/6000K	1147X120X53MM
TL-WPCO-02-80	80W	8000 lm	100lm/W	3000K/6500K	1147X120X53MM

